


TYPICAL TEST RESULT

IMPACT $L_nTW = 57dB$ AIRBORNE $D_nTW = 55dB$ $D_nTW + CTR = 48dB$

HUSH-PANEL 28 FLOATING FLOOR WITH ALL ROOM PERIMETERS SEALED USING HUSH-SEAL 20.

OVER A 200MM IN SITU CONCRETE SLAB (400KG/M²)

TO THE UNDERSIDE OF THE CONCRETE TIMBER BATTENS ARE FIXED, AT THE DESIRED CENTRES, PRIOR TO FIXING A LAYER OF 12.5MM SOUNDBLOC OR FIRELINE PLASTERBOARD. ALL CEILING PERIMETERS TO BE SEALED BEFORE SKIMMING.

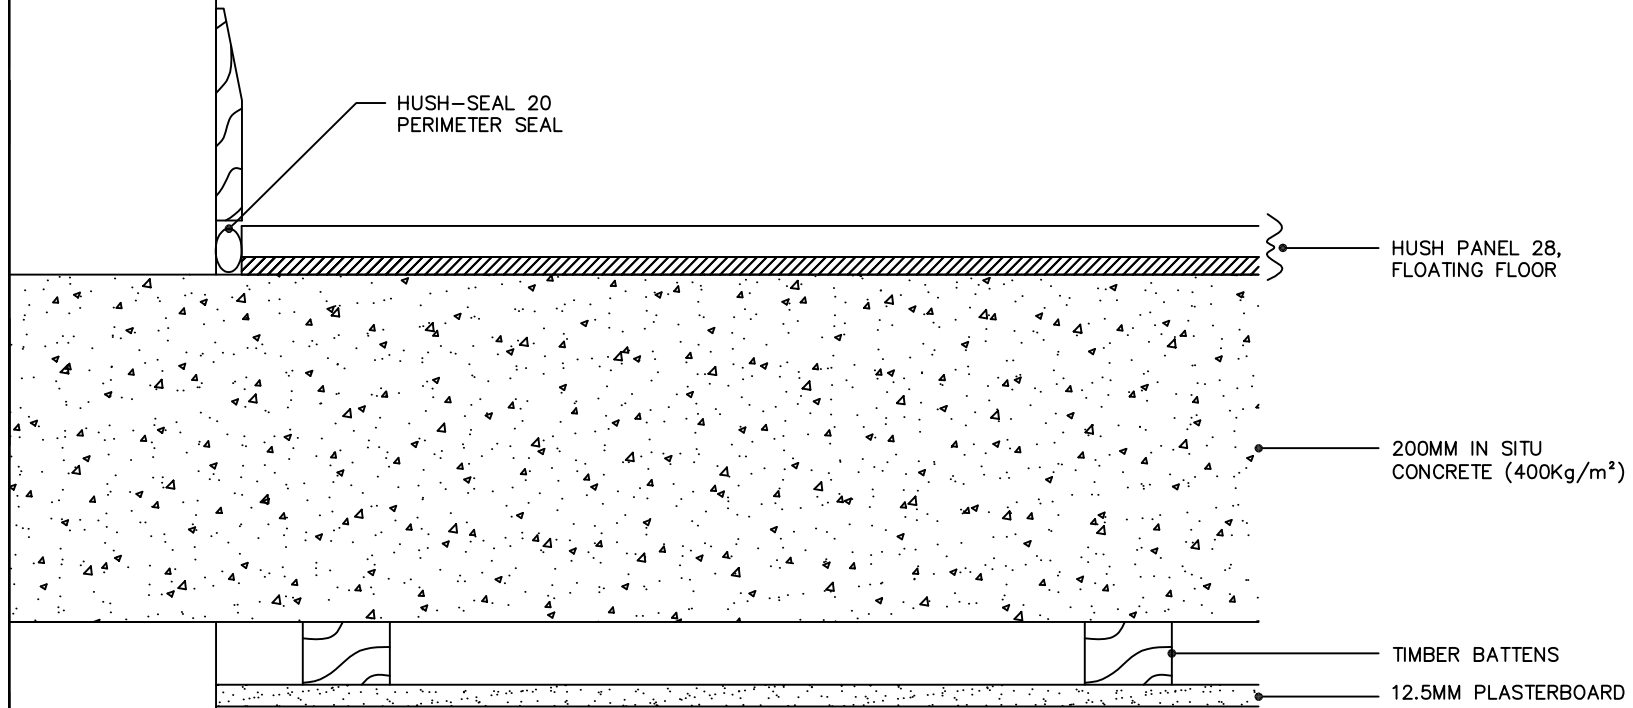

HUSH (UK) LTD
HUSH-SYSTEM HDC
TYPE HD1007