


AYLESBURY K TYPE
DIMENSIONS – SIDE VIEW

SIZES (DN): ½”(15), ¾”(20), 1”(25), 1¼”(32), 1½”(40)SF,
1½”(40)HF, 2”(50)SF

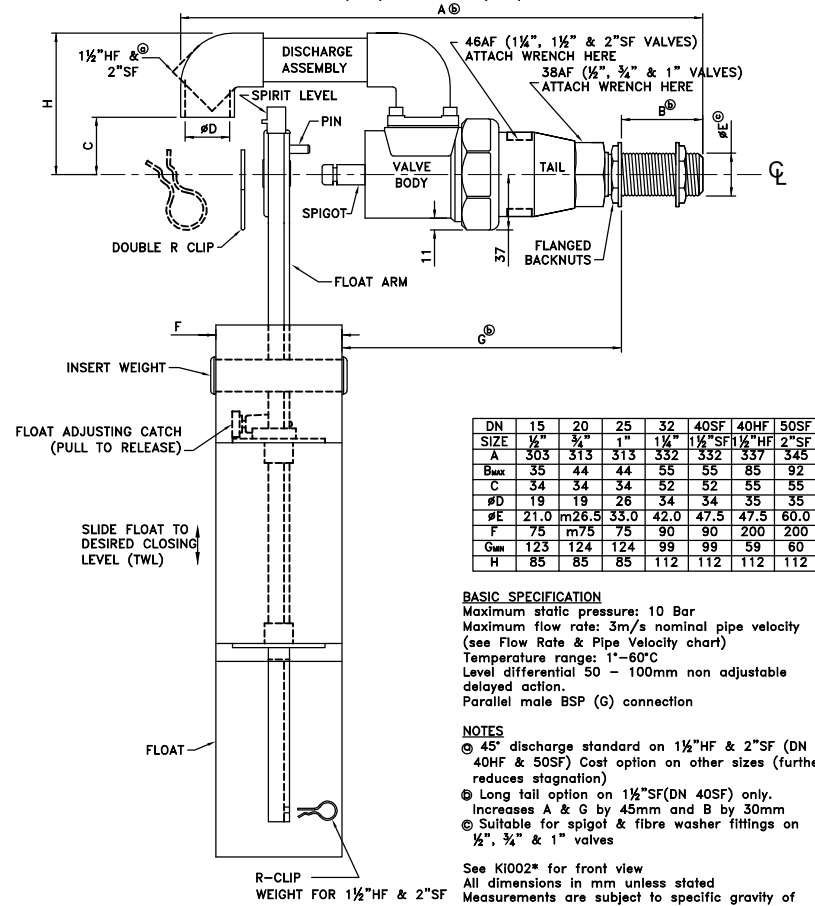

DN	15	20	25	32	40SF	40HF	50SF
SIZE	½”	¾”	1”	1¼”	1½”SF	1½”HF	2”SF
A	303	313	313	332	332	337	345
B _{max}	35	44	44	55	55	85	92
C	34	34	34	52	52	55	55
ØD	19	19	26	34	34	35	35
ØE	21.0	m26.5	33.0	42.0	47.5	47.5	60.0
F	75	m75	75	90	90	200	200
G _{min}	123	124	124	99	99	59	60
H	85	85	85	112	112	112	112

BASIC SPECIFICATION
 Maximum static pressure: 10 Bar
 Maximum flow rate: 3m/s nominal pipe velocity
 (see Flow Rate & Pipe Velocity chart)
 Temperature range: 1°–60°C
 Level differential 50 – 100mm non adjustable
 delayed action.
 Parallel male BSP (G) connection

NOTES
 Ⓐ 45° discharge standard on 1½”HF & 2”SF (DN 40HF & 50SF) Cost option on other sizes (further reduces stagnation)
 Ⓑ Long tail option on 1½”SF (DN 40SF) only. Increases A & C by 45mm and B by 30mm
 Ⓒ Suitable for spigot & fibre washer fittings on ½”, ¾” & 1” valves

See K1002* for front view
 All dimensions in mm unless stated
 Measurements are subject to specific gravity of solution
 Keraflo Ltd reserve the right to change specifications, design and materials without prior notice



KERAFLO LTD
 UNIT 1 WOODLEY PARK EST.
 59-69 READING ROAD
 WOODLEY, READING
 BERKSHIRE, RG5 3AN, UK
 TEL: +44 (0)118 921 9920
 FAX: +44 (0)118 921 9921
 e-mail: info@keraflo.co.uk
 web site: www.keraflo.co.uk