

# AYLESBURY K TYPE DIMENSIONS – FRONT VIEW


SIZES (DN): 2”(50)HF, 2½”(65)SF, 3”(80)RB

## BASIC SPECIFICATION


Maximum static pressure: 10 Bar  
 Maximum flow rate: 3m/s nominal pipe velocity  
 (see Flow Rate & Pipe Velocity chart)  
 Temperature range: 1°–60°C  
 Level differential 50 – 100mm non adjustable  
 delayed action.  
 Parallel male BSP (G) connection, screwed flanges  
 available as cost option

See Ki083\* for side view  
 All dimensions in mm unless stated  
 Measurements are subject to specific gravity of  
 solution

Keraflo Ltd reserve the right to change  
 specifications, design and materials without prior  
 notice

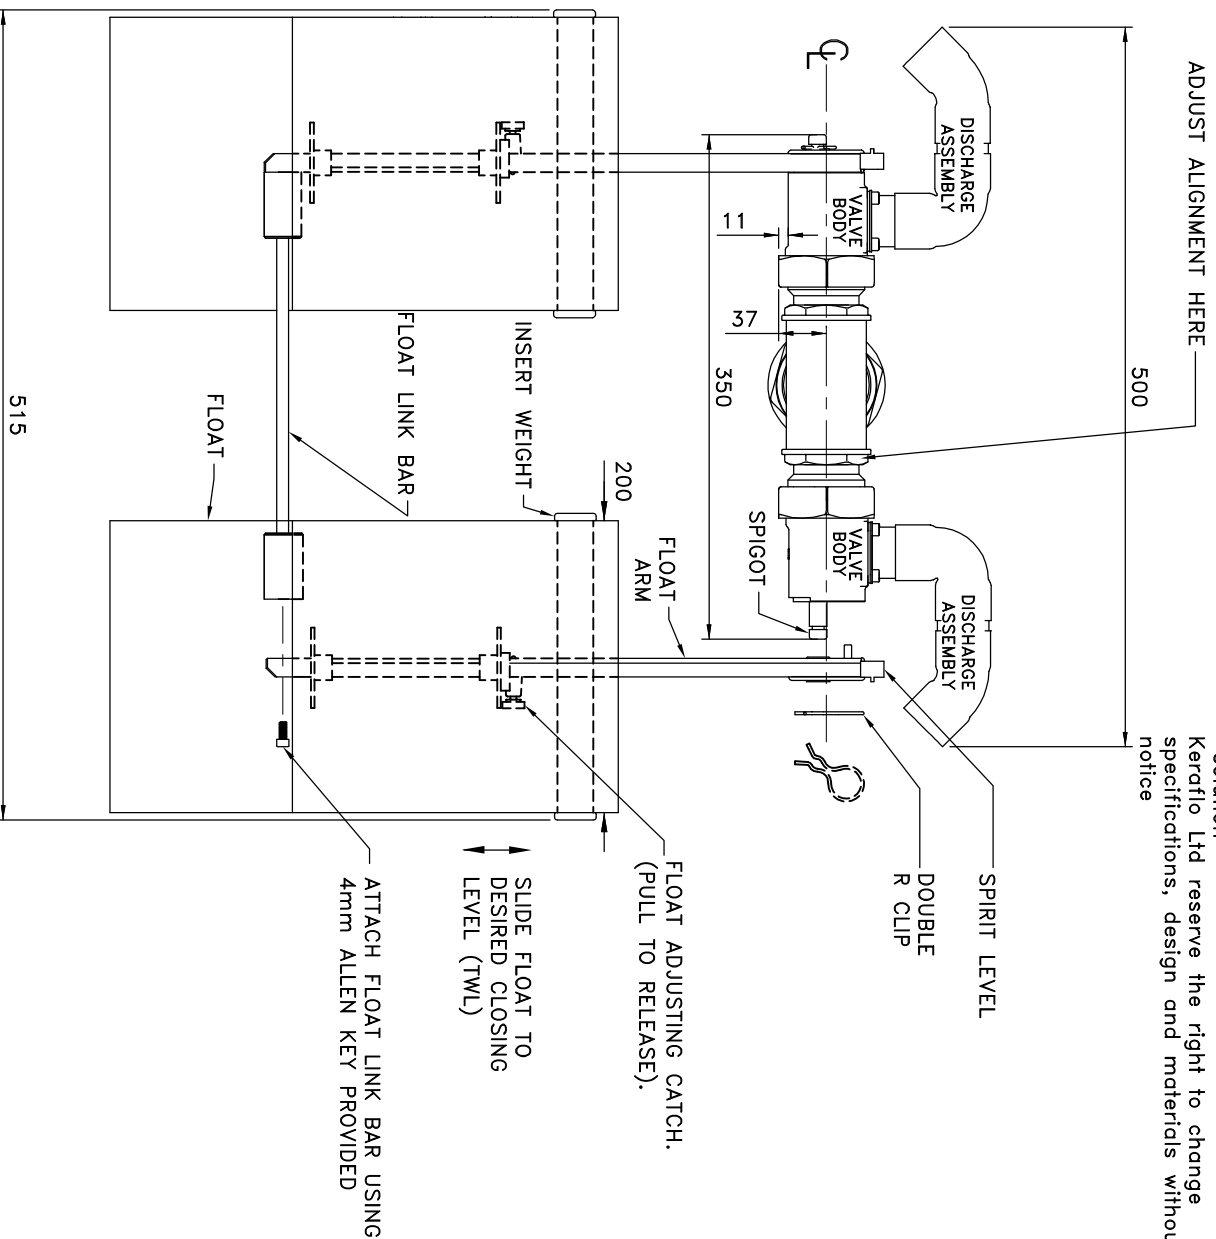

Ki084B  
 26/11/07

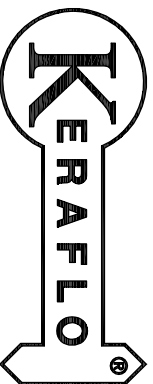

KERAFLO LTD  
 UNIT 1 WOODLEY PARK EST.  
 59-69 READING ROAD  
 WOODLEY, READING  
 BERKSHIRE, RG5 3AN, UK  
 TEL: +44 (0)118 921 9920  
 FAX: +44 (0)118 921 9921  
 e-mail: info@keraflo.co.uk  
 web site: www.keraflo.co.uk