


AYLESBURY KB TYPE DIMENSIONS – SIDE VIEW

SIZES (DN): 2”(50)HF, 2½”(65)SF, 3”(80)RB

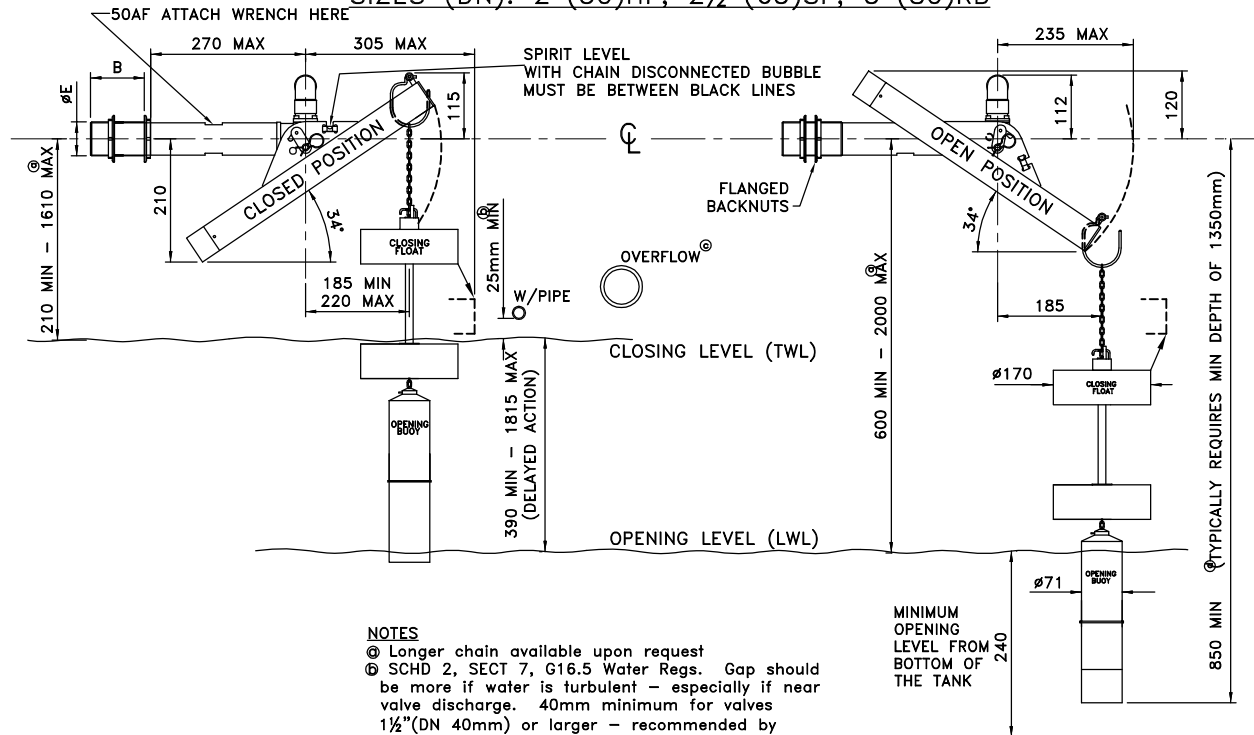

NOTES

- Ⓒ Longer chain available upon request
- Ⓓ SCHD 2, SECT 7, G16.5 Water Regs. Gap should be more if water is turbulent – especially if near valve discharge. 40mm minimum for valves 1½”(DN 40mm) or larger – recommended by Keraflo.
- Ⓔ Typically twice inlet bore. SCHD 2, SECT 7, G16.10 Water Regs.– warning/overflow pipe(s) should be capable of taking any possible flow in the pipe arising from inlet valve failure.
- Ⓕ When opening level = 575mm

See KI025* for front view
All dimensions in mm unless stated.
Measurements are subject to specific gravity of solution.
Keraflo Ltd reserve the right to change specifications, design and materials without prior notice.

DN	50HF	65SF	80RB
SIZE	2”HF	2½”SF	3”RB
B _{max}	95	100	99
∅E	60.0	75.5	89.0



KERAFLO LTD
UNIT 1 WOODLEY PARK EST.
59-69 READING ROAD
WOODLEY, READING
BERKSHIRE, RG5 3AN, UK
TEL: +44 (0)118 921 9920
FAX: +44 (0)118 921 9921
e-mail: info@keraflo.co.uk
web site: www.keraflo.co.uk