


Tiles laid and fixed in accordance with manufactures instructions

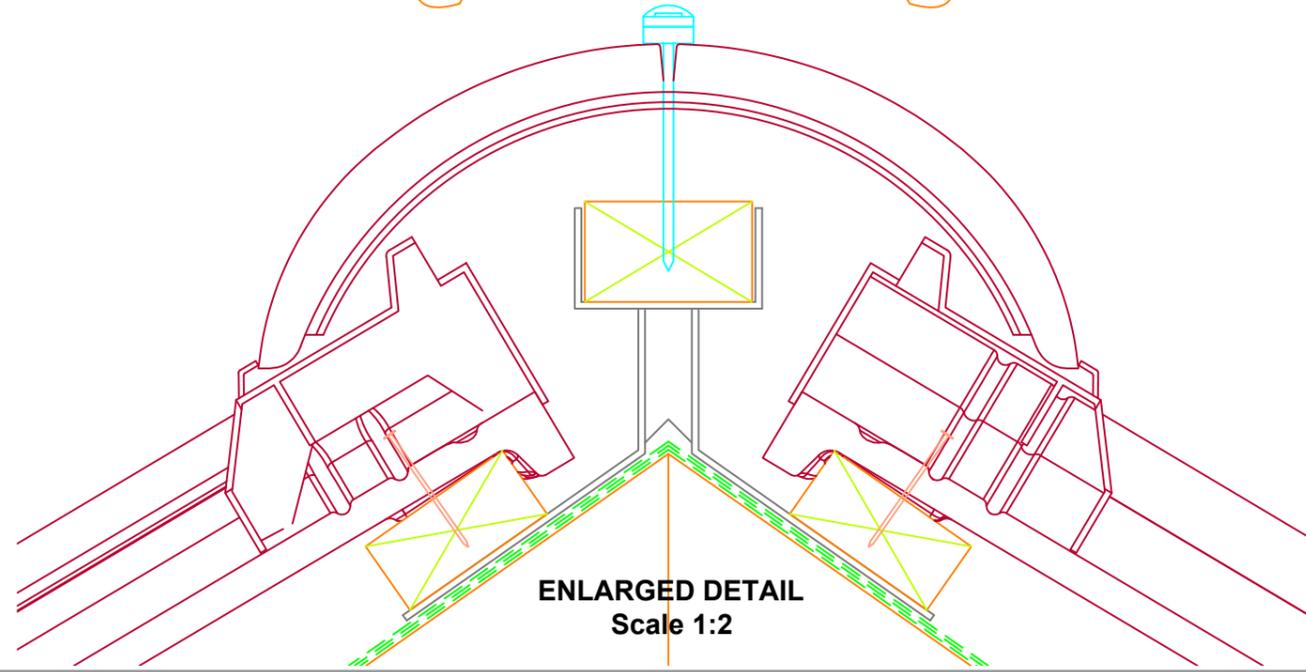

**ENLARGED DETAIL**  
Scale 1:2

**NOTES:**  
When using a vapour permeable (LR) underlay, Forticrete in line with BS5250 recommend that the batten cavity is ventilated from eave to ridge.

REV:	DATE: 09/02/2018	BY: DA
NOTES:		
TITLE: Centurion & Senator - Ridge Mechanical Fixed Ridge Truss Roof - Max Pitch 55°		
SCALE: 1:5 at A3	DWG NO: FC-0074	REV: A