
## Flexible plug and mastic seal—

	Code 4 lead flashing in accordance — with lead sheet association
	Timber fillet
	Code 4 lead apron
	Mono pitch ridge felt spacer to provide 5mm continuous air gap
	Abutment clip
	Top slate retaining clip
	Vented top filler fixed in accordance with manufactures instructions
	Top slate
	Tiles laid and fixed in accordance with manufactures instructions Air path <
	Main slate
	40mm x 3.35mm Aluminium nail
	50 x 25 tiling battens or to BS 5534
	Underlay to BS 5534
Air path	
ENLARGED DETAIL Air path Scale 1:2	
Technical Helpline 01525 244950	THE INFORMATION SHOWN ON THIS DRAWING IS SENT IN CONFIDENCE AND MUST NOT BE USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUPPLIED.
01525 244950 www.forticrete.com	REFER ANY OMISSIONS OR ERRORS TO FORTICRETE LTD. (DO NOT SCALE FROM THIS DRAWING). COPYRIGHT © FORTICRETE LTD

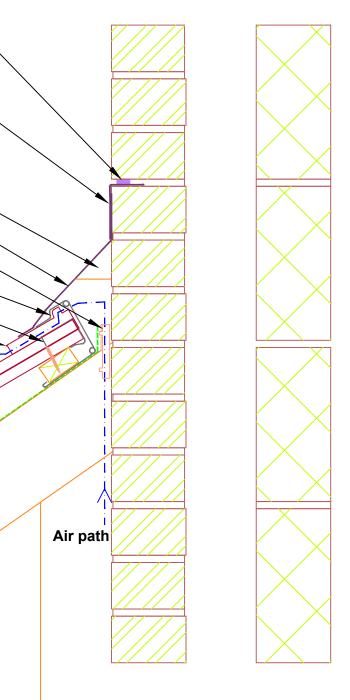

## NOTES:

When using a vapour permeable (LR) underlay, Forticrete in line with BS5250 recommend that the batten cavity is ventilated from eave to ridge.

rev: d Notes:	DATE: 09/02/2018	BY: DA
TITLE: Hardrow Head Ab	/ Slate - 18 x 12 utment	
SCALE: <b>1:5</b> at A3	DWG NO: FC-0159	REV: A

## Forticrete