

450mm Block angle ridge laid and fixed in accordance with manufacturers instructions

Stainless steel screw, washer and cover cap

Ridge seal

450mm angle ridge tile laid and fixed in accordance with manufacturers instructions


Once lapped over the ridge, the underlay is located on top of the outer wall and beneath the undercloak if bedded

Undercloak

Cavity closer

Mechanically fixed verge units

Insulation in accordance with current British Standards and building regulations

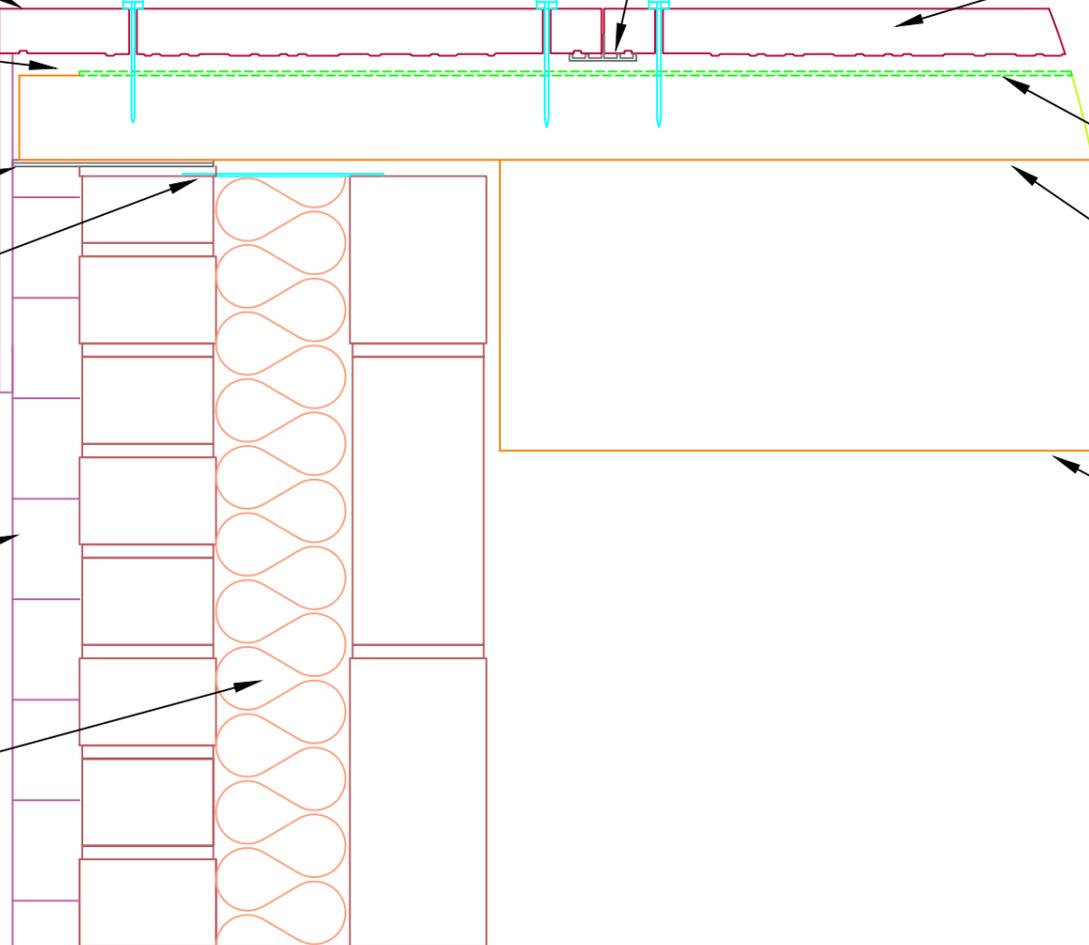

Underlay to BS 5534

Additional 25 X 50 battens if required

Ridge board

REV: DATE: 09/02/2018 BY: DA
NOTES:

TITLE: Minislate - Ridge Mechanically Fixed Ridge Board Section - Max Pitch 55°		
SCALE: 1:5 at A3	DWG NO: FC-0061	REV: A