

ACOUSTIC PERFORMANCE

ABSORBER THICKNESS	SOUND ABSORPTION COEFFICIENT							ABSORBER CLASS
	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	α_w	
30mm	0.15	0.3	0.7	0.85	0.85	0.75	0.6	C

PLEASE NOTE ALL TESTING WAS CARRIED OUT AT THE UNIVERSITY OF SALFORD IN ACCORDANCE WITH BS EN ISO 11654 : 1997

HUSH ABSORBER 30 SIZES:

1200 x 1000 x 30mm	2000 x 600 x 30mm
1200 x 600 x 30mm	1200 x 1200 x 30mm
600 x 500 x 30mm	1200 x 1000 x 30mm
2400 x 1200 x 30mm	1200 x 600 x 30mm
2400 x 1000 x 30mm	1200 x 500 x 30mm
2400 x 600 x 30mm	600 x 600 x 30mm
2000 x 1200 x 30mm	500 x 500 x 30mm
2000 x 1000 x 30mm	

HUSH CAN ALSO PROVIDE BESPOKE ABSORBER SIZES IF REQUIRED. THIS INCLUDES PANEL THICKNESS AND ALSO PANEL SIZE.

FEATURES

CLASS C ACOUSTIC PERFORMANCE.


FITS ON ANY ALIGNMENT AND ANGLE INCLUDING SLOPES AND CEILING IN BOTH PORTRAIT AND LANDSCAPE.

STYLISH AND VISUALLY PLEASING DESIGNS AVAILABLE IN A CHOICE OF SIZES, COLOURS AND FINISHES.

SIMPLE AND CLEAN TO INSTALL-NO DRILLING OR MESS. SIMPLY INSTALL USING HUSH ABSORBER ADHESIVE.

FABRIC COVERS WITH OPTIONAL CLASS 1 TO CLASS 0 FLAME RETARDANT.

WIDE RANGE OF FABRIC COLOUR OPTIONS. PLEASE SEE FABRIC COLOUR CHARTS.

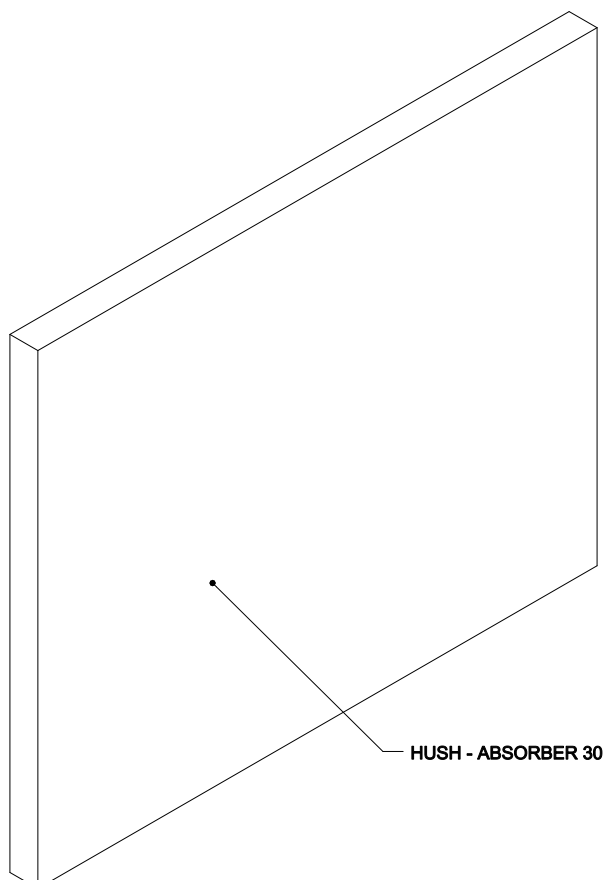

HUSH (UK) LTD
HUSH - ABSORBER 30