

PRODUCT DATA

MATERIAL: RECYCLED RUBBER CRUMB BONDED WITH POLYURETHANE

ROLL DIMENSIONS: 6m LENGHT x 1250mm WIDTH

PRODUCT THICKNESS: 10mm

WEIGHT: 58kg

DENSITY: APPROX 770kg/m³

TENSILE STRENGTH: APPROX 0.8 N/mm² (DIN EN ISO 1798)

ELONGATION AT BREAK: APPROX 125% (DIN EN ISO 1798)

FIRE RESISTANCE: Efl (EN 13501-1)


SERVICE TEMPERATURE: -30°C TO + 80°C

CHEMICAL RESISTANCE: CONDITIONALLY RESISTANT TO ACIDS AND BASES.

ENVIRONMENTAL RESISTANCE: ROT-PROOF AND WATER RESISTANT.

APPLICATION

HUSH FR ROOFING MEMBRANE SHOULD BE USED IN CONJUNCTION WITH HUSH ACOUSTICS FLAT ROOF SOLUTIONS IN THE REDUCTION OF AIRBORNE AND IMPACT NOISE (e.g. RAINWATER).

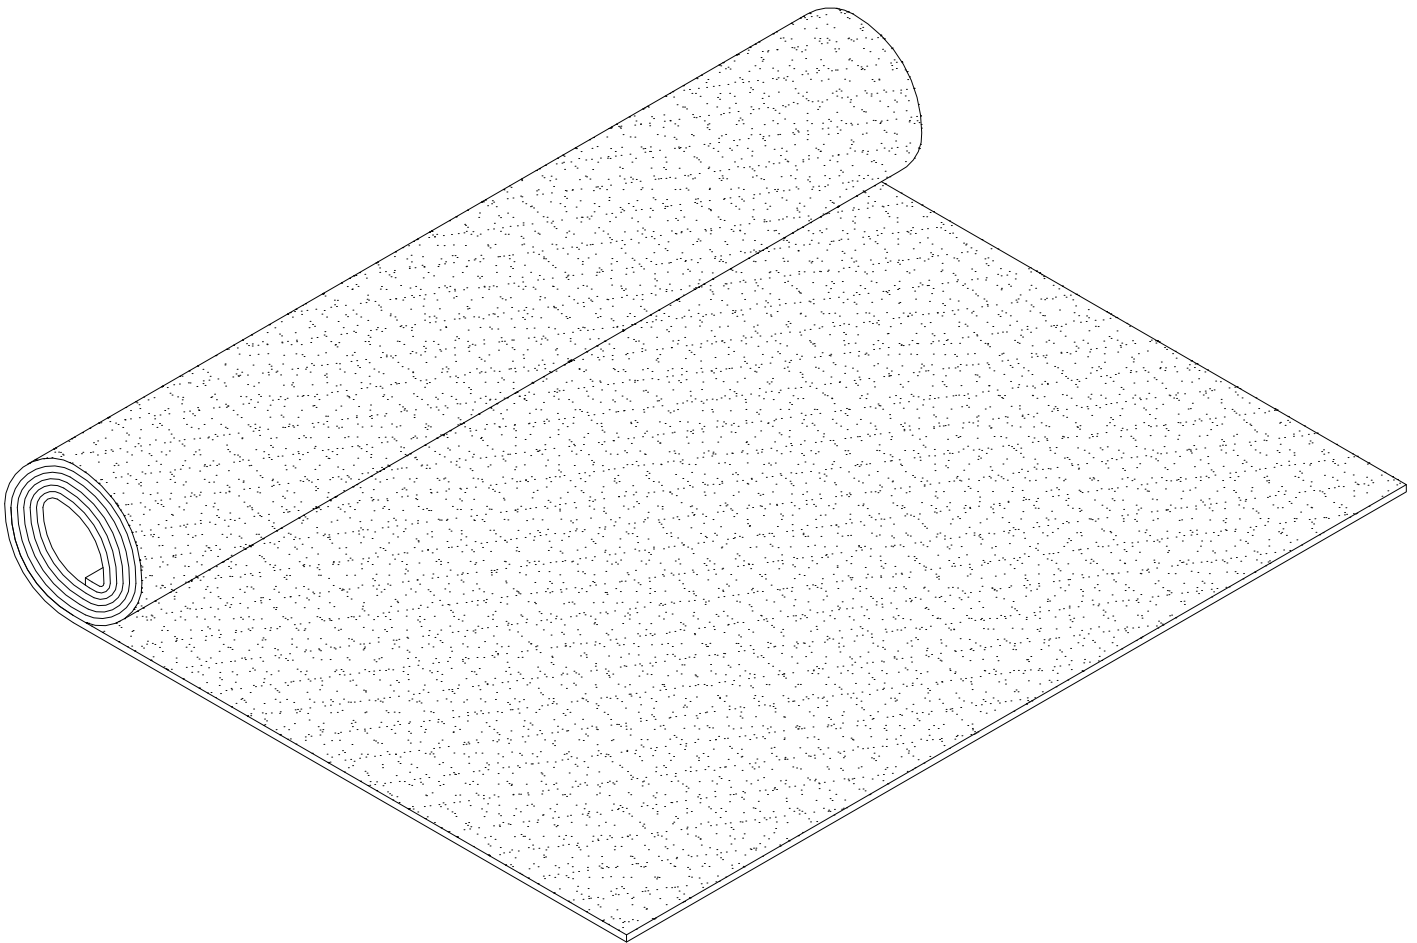

**HUSH (UK) LTD
HUSH FR FLOORING MEMBRANE**