

ACOUSTIC PERFORMANCE

IMPACT LnTW = 49dB AIRBORNE DnTW = 57dB AIRBORNE DnTW + Ctr dB = 51dB

RESULTS BASED ON HUSH-MAT 15 ABOVE PLASTERBOARD ON RESILIENT BARS.

PRODUCT DATA

SIZE = 1250 x 1000mm

(NOMINAL) THICKNESS = 15mm

WEIGHT = 15kg / m²

CUTTING: BY SHARP LONG BLADED TRIMMING KNIFE. SCORE THE SURFACE THEN RUN THROUGH WITH KNIFE SEVERAL TIMES TO AVOID TEARING. WHEN SHAPING, USE LARGE SCISSORS OR TIN SNIPS. A CIRCULAR SAW SHOULD BE USED FOR LARGE NUMBERS OF STRAIGHT CUTS.

ACCESSORIES

PERIMETER STRIP: 1200mm LONG x 25mm WIDE x 9mm DEPTH.

HUSH dB MAT ADHESIVE: 10ltr TUB - COVERAGE UP TO 20m² PER TUB DEPENDING ON SUBSTRATE.

STORAGE

HUSH MAT 15 MUST BE LAID FLAT AND KEPT DRY.

HUSH MAT 15 SHOULD ONLY BE STORED ON SITE IF THE BUILDING HAS BEEN SEALED AND IS COMPLETELY DRY.

FEATURES

BUILDING REGULATIONS PART E (ENGLAND AND WALES), SECTION 5 (SCOTLAND) AND PART G (NORTHERN IRELAND).


EXCELLENT IMPACT SOUND PERFORMANCE LEVELS DUE TO IT'S UNIQUE DESIGN.

IMPROVES AIRBORNE SOUND INSULATION.

SIMPLY LAID UNDER MOST FLOOR FINISHES.

EASILY CUT AND SHAPED.

SUITABLE FOR OVER TIMBER OR CONCRETE FLOOR STRUCTURES.

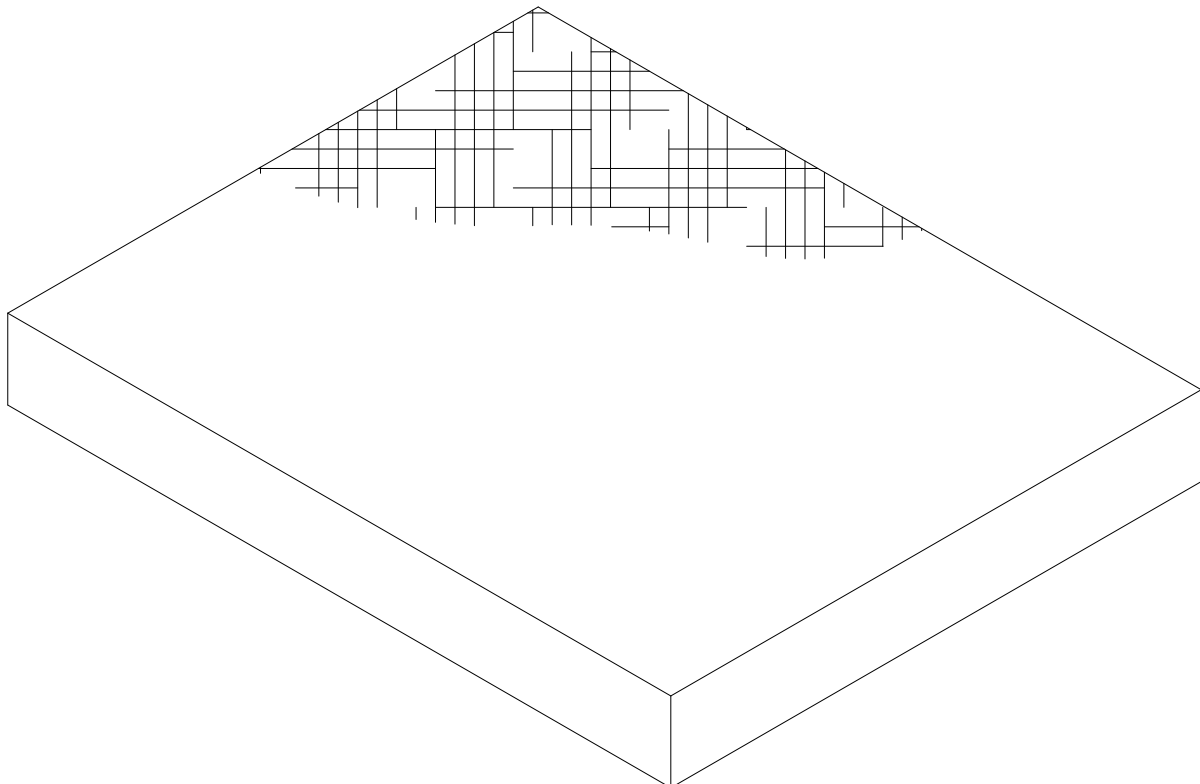

HUSH (UK) LTD
HUSH - MAT 15