

ACOUSTIC PERFORMANCE

IMPACT L_nTW = 45dB AIRBORNE D_nTW = 62dB AIRBORNE D_nTW + C_{tr} dB = 55dB

RESULTS BASED ON HUSH PANEL 23 BEING LAID OVER A CONCRETE STRUCTURE, WITH A SUITABLE CEILING TREATMENT AND ALL FLANKING PATHS REMOVED.

PRODUCT DATA

AN ACOUSTIC FLOOR DECK TO BE USED AS AN OVERLAY SOLUTION TO CONCRETE STRUCTURES.

COMPRISES OF 18mm P5 MOISTURE RESISTANT TONGUED AND GROOVED CHIPBOARD AND A 5mm HUSHFELT™ RESILIENT LAYER.

OVERALL BOARD DIMENSIONS 2400 x 600 x 23mm.

FFL LEVEL OVER CONCRETE STRUCTURE IS 21mm.

FEATURES

ECONOMICAL ACOUSTIC FLOATING FLOORBOARD.

TO BE USED IN NEW BUILD DEVELOPMENTS WITH CONCRETE FLOORS.


BUILDING REGULATIONS COMPLIANT FOR DOCUMENT E (ENGLAND & WALES), SECTION 5 (SCOTLAND) AND PART G (NORTHERN IRELAND)

CAN BE USED AS PART OF A CODE FOR SUSTAINABLE HOMES SPECIFICATION.

COMPLIANT WITH ROBUST DETAILS CRITERIA.

CAN BE USED WITH ALL FLOOR FINISHES AS LONG AS THE CORRECT PRACTICES ARE FOLLOWED.

A PEEL CLEAN VERSION CAN BE AVAILABLE ON REQUEST.

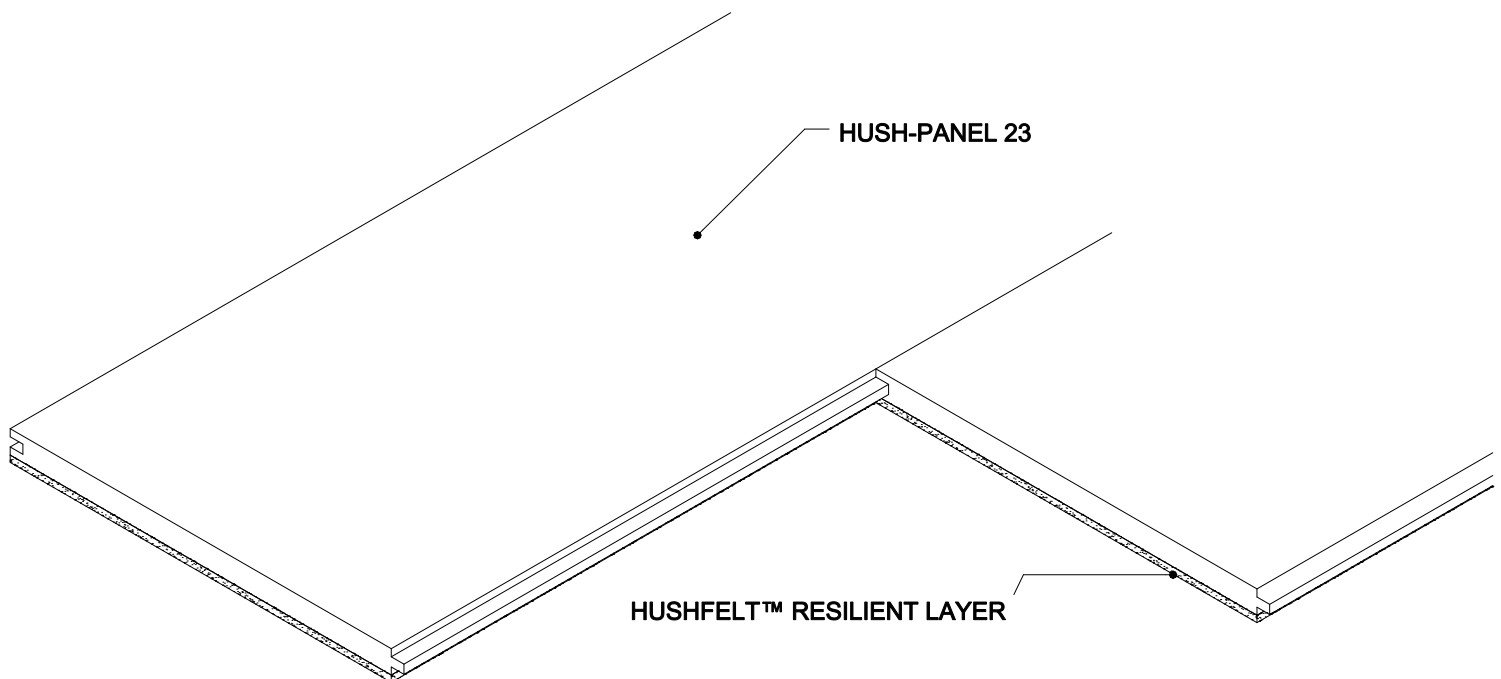

HUSH (UK) LTD
HUSH PANEL 23