

## ACOUSTIC PERFORMANCE

IMPACT L<sub>n</sub>TW = 55dB    AIRBORNE D<sub>n</sub>TW = 55dB    AIRBORNE D<sub>n</sub>TW + C<sub>tr</sub> dB = 49dB

RESULTS BASED ON 200mm TIMBER JOISTS AT 450mm CENTRES.

## PRODUCT DATA

CAN BE LAID OVER CONCRETE, EXISTING TIMBER FLOORS OR DIRECTLY OVER JOISTS UP TO 450mm CENTRES \*

COMPRISES 18mm WBP TONGUED AND GROOVED PLYWOOD WITH 10mm HUSHFELT™ RESILIENT LAYER.

OVERALL BOARD DIMENSIONS 2400mm x 600mm x 28mm.

OVERALL NOMINAL THICKNESS 28mm.

FFL OVER FLOOR DECK 26mm.

FFL OVER TIMBER JOISTS \*36mm (USED IN CONJUNCTION WITH HUSH-10 JOIST STRIP).

## FEATURES

STRONG, DURABLE AND WATERPROOF.

IDEAL FOR FLOORING FINISHES WHICH REQUIRE SCREW FIXINGS.

REFURBISHMENT AND NEW BUILD.


CAN BE TILED OVER IF USED WITH PERMALAYER AND A FLEXIBLE ADHESIVE.

CAN BE USED AS PART OF A CODE FOR SUSTAINABLE HOMES COMPLIANT DEVELOPMENT.

BUILDING REGULATIONS PART E (ENGLAND AND WALES), SECTION 5 (SCOTLAND) AND PART G (NORTHERN IRELAND).

ROBUST DETAILS FFT5 COMPLIANT FOR FLOOR STRUCTURES EFC-1, EFC-2 AND EFS-1.

EASY TO INSTALL IN A SINGLE TIME SAVING OPERATION.

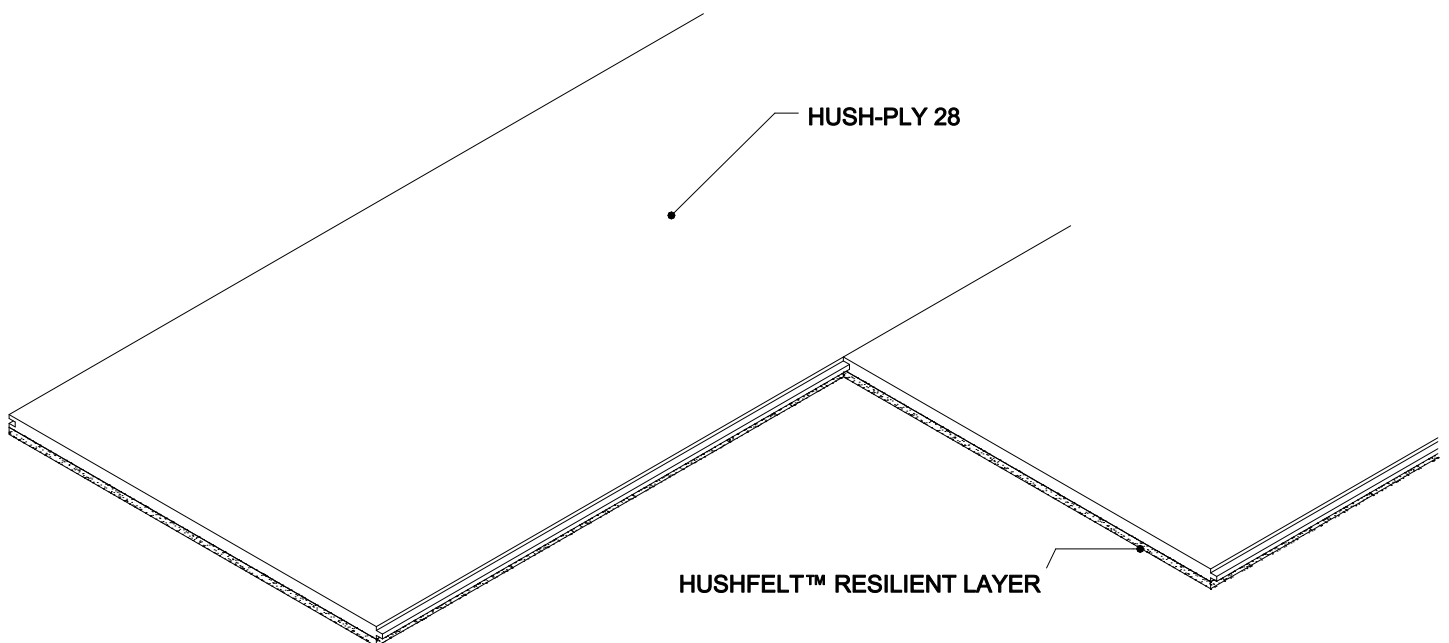

HUSH (UK) LTD  
HUSH - PLY 28