

ACOUSTIC PERFORMANCE

IMPACT L_nTW = 56dB AIRBORNE D_nTW = 61dB AIRBORNE D_nTW + C_{tr} dB = 57dB

RESULTS FOR HUSH SCREED PANEL 30

PRODUCT DATA

OVERALL BOARD DIMENSIONS 1500 x 500 x 30mm -- 0.75 m²

WEIGHT PER m² 26.00kg

HUSH SCREED BOARD 30 JOINTS MUST BE GLUED USING THE HUSH SCREED BOARD ADHESIVE

HUSH SCREED BOARD 30 PERIMETER TO BE SEALED USING THE HUSH SEAL 20 PERIMETER STRIP OF THE HUSH RANGE OF FLANKING STRIPS.

FEATURES

HIGH MASS ACOUSTIC FLOORING TO IMPROVE BOTH AIRBORNE AND IMPACT NOISE ISSUES.

EXCELLENT ACOUSTIC PERFORMANCE.


VERY STABLE SURFACE TO CARRY MANY FLOOR FINISHES.

DOCUMENT E COMPLIANT (ENGLAND & WALES), SECTION 5 COMPLIANT (SCOTLAND), PART G COMPLIANT (NORTHERN IRELAND).

CAN BE USED AS PART OF A CODE FOR SUSTAINABLE HOMES COMPLIANT SPECIFICATION.

CAN BE USED TO FORM A ROBUST DETAILS COMPLIANT SYSTEM.

IMPROVES AIRBOURNE ACOUSTIC PERFORMANCE AS A FLOORING PRODUCT.

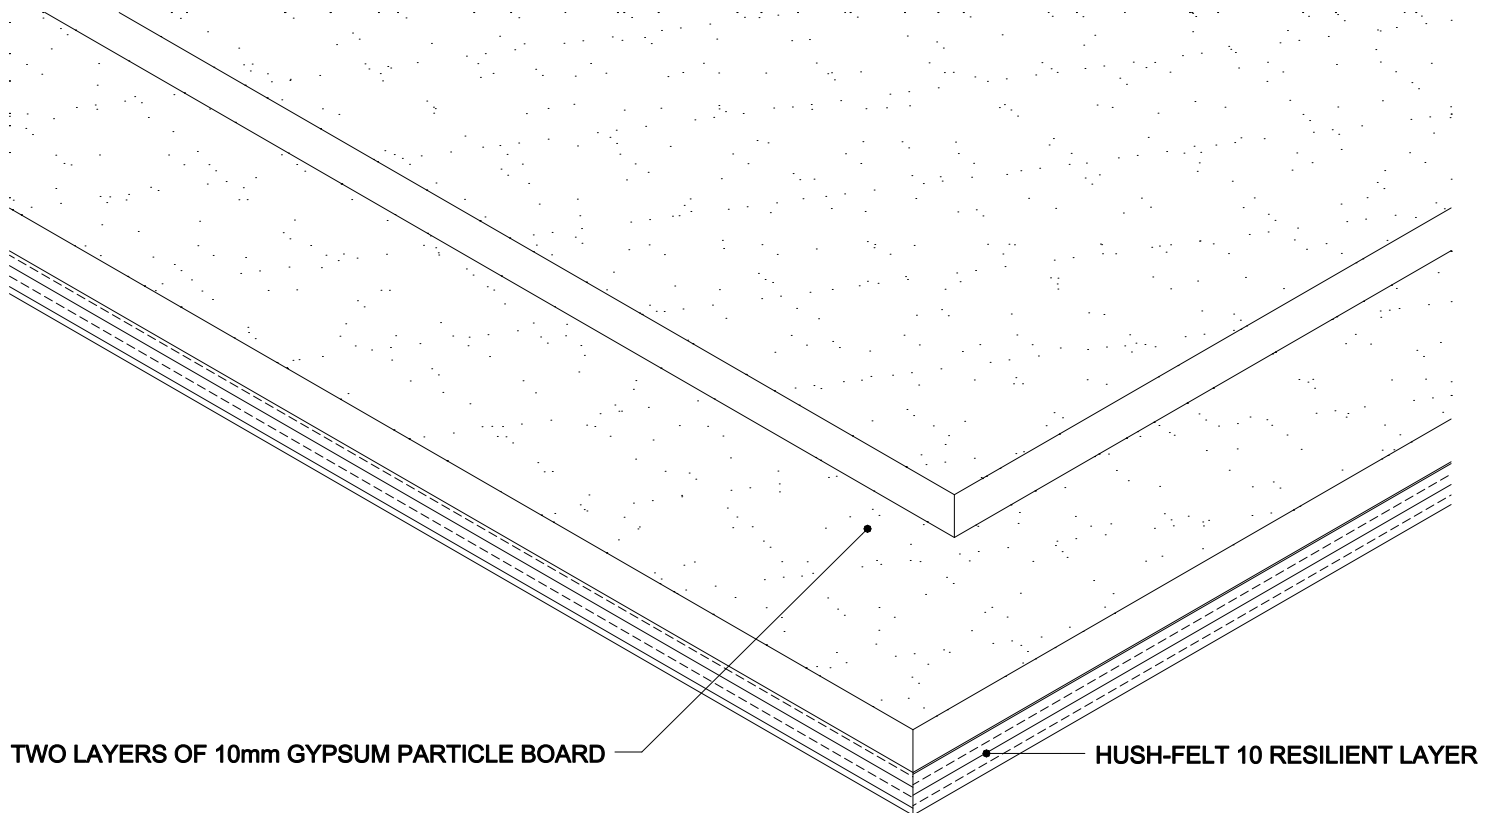

HUSH (UK) LTD
HUSH SCREED PANEL 30