

#### PRODUCT DATA

ROLL DIMENSIONS: 15m x 1m m<sup>2</sup> PER ROLL (BS 5808:1991)

PRODUCT THICKNESS: 1.6mm (BS 4051:1987)

WEIGHT: 1.04kg/m<sup>2</sup> (ISO 7322:2014)

DENSITY: 650kg/m<sup>3</sup> (ISO 7322:2014)

TENSILE STRENGTH: >500kPa (ISO 7322:2014)

COMPRESSION: 15% (ASTM F36)

RECOVERY FROM COMPRESSION: >65% (ASTM F36)

TOG RATING: 0.15

OPERATING TEMPERATURE RANGE - - 30 TO 90°C

DYNAMIC STIFFNESS: 134MN/m<sup>3</sup> (ISO 9052-1:1989)

IMPACT SOUND REDUCTION: 18dB (ISO 10140-3:2010)

#### FEATURES

EASY TO INSTALL.

REMAINS CONTINUALLY ELASTIC.

FULLY RECYCLED.

MINIMUM CONSTRUCTION HEIGHT.

TO BE USED OVER CONCRETE AND SCREEDED FLOORS.


HELPS TO COMPLY WITH ALL UK BUILDING REGULATION STANDARDS. INCLUDING DOCUMENT E (ENGLAND & WALES), SECTION 5 (SCOTLAND) AND PART G (NORTHERN IRELAND).

SUITABLE FOR REFURBISHMENT / NEW BUILD.

FOR USE WITH UNDER FLOOR HEATING.

LOW TOG RATING SO EXCELLENT FOR UNDERFLOOR HEATING SYSTEMS.

EXCELLENT FOOTFALL NOISE REDUCTION.

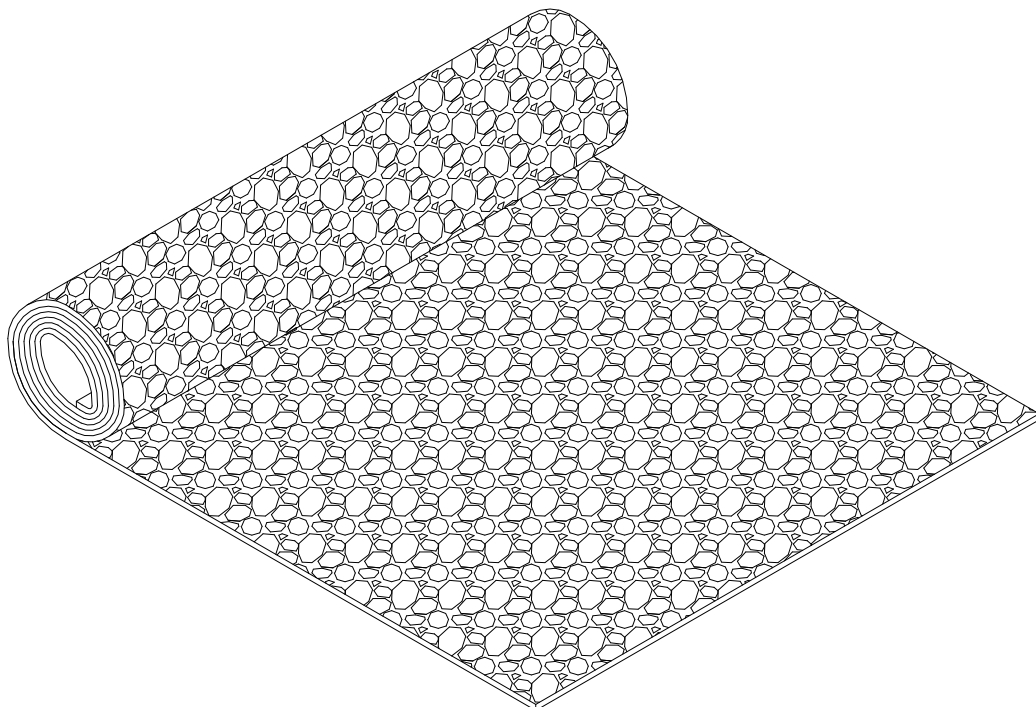

**HUSH (UK) LTD**  
**HUSH UNDERLAY FOR LVT FLOORING**