

NOTE:
KEYSTONES SHOWN CAN BE USED IN CONJUNCTION WITH ALL STANDAND HEAD TYPES.

WHERE A PROJECTING KEYSTONE IS REQUIRED (KEYSTONE TYPES 1 AND 2) THE HEAD WILL BE SUPPLIED IN MINIMUM OF 3PCS.


LINTELS COMPRISING OF KEYSTONE TYPE 3 AND 4 CAN BE SUPPLIED IN 1PC SUBJECT TO REQUIREMENTS & LENGTH RESTRICTIONS

ALL HEADS ARE NON-LOAD BEARING COMPONENTS AND MUST BE USED IN CONJUNCTION WITH A SUITABLE LOAD RELIEVING LINTEL. PLEASE CONSULT YOUR ENGINEER PRIOR TO INSTALLATION.

NON-STANDARD KEYSTONES MANUFACTURED TO ORDER.
KEYSTONES TO SUIT LINTELS IN RENDER ALSO AVAILABLE

KEYSTONE TYPE 1 AND 2 TO BE USED ONLY WITH LINTELS 215MM OR 290MM HIGH. THE FORMER ACHEIVING A PROJECTED KEYSTONE AS ILLUSTRATED

KEYSTONE TYPE 3 AND 4 TO BE USED ONLY WITH LINTELS 140MM OR 215MM HIGH. THE LATTER ACHEIVING A FLUSH KEYSTONE AS ILLUSTRATED

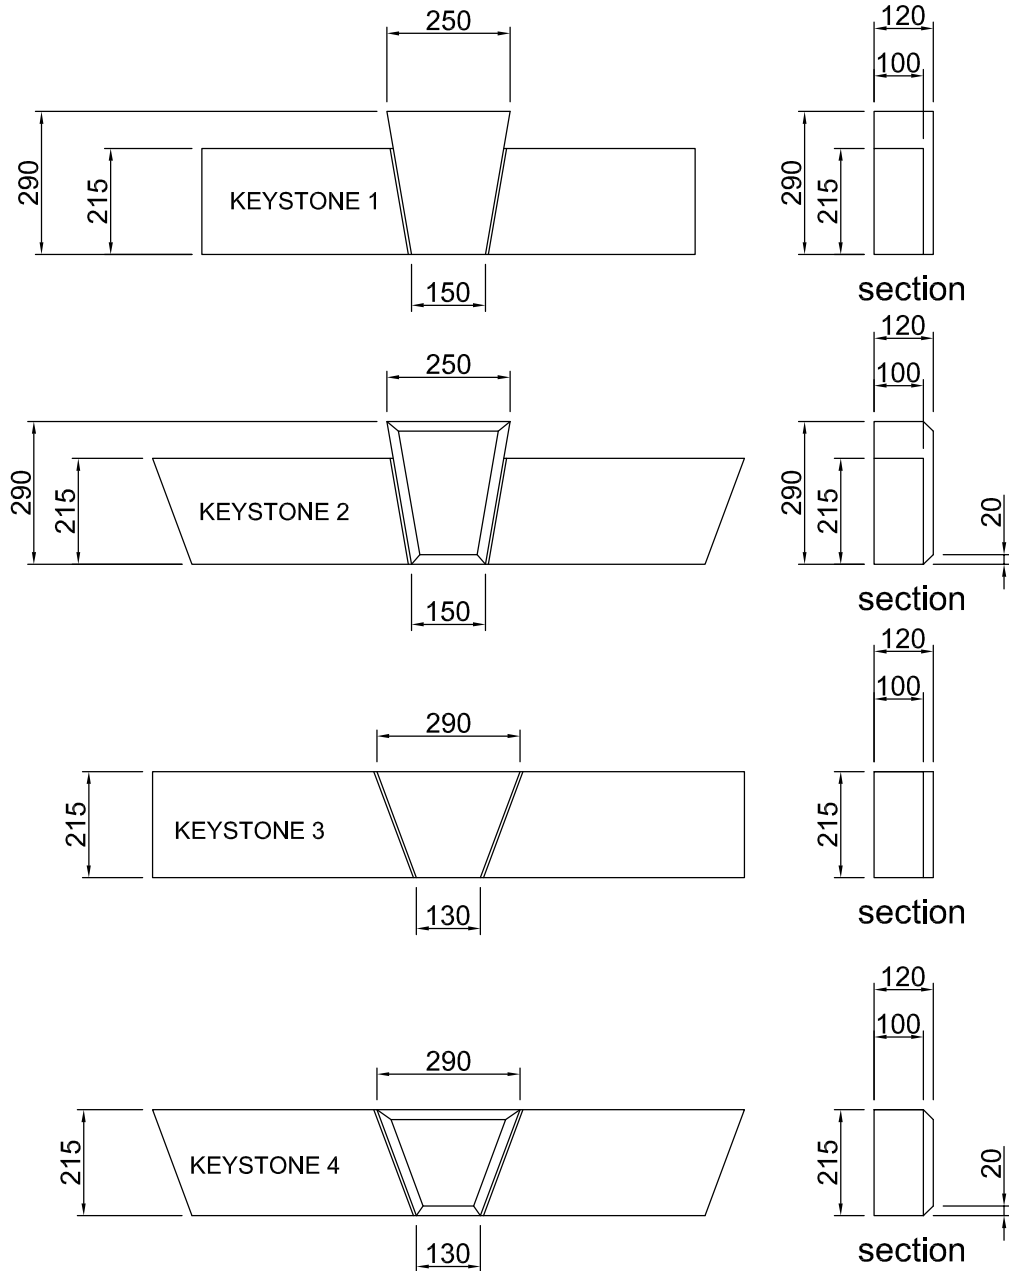

PROCTER CAST STONE KEYSTONES