


30° Roof Pitch

Fixing in accordance with the manufacturers printed instructions, BS5534 part 1 2003, BS8000 part 6 1990 and H61/210 and 275

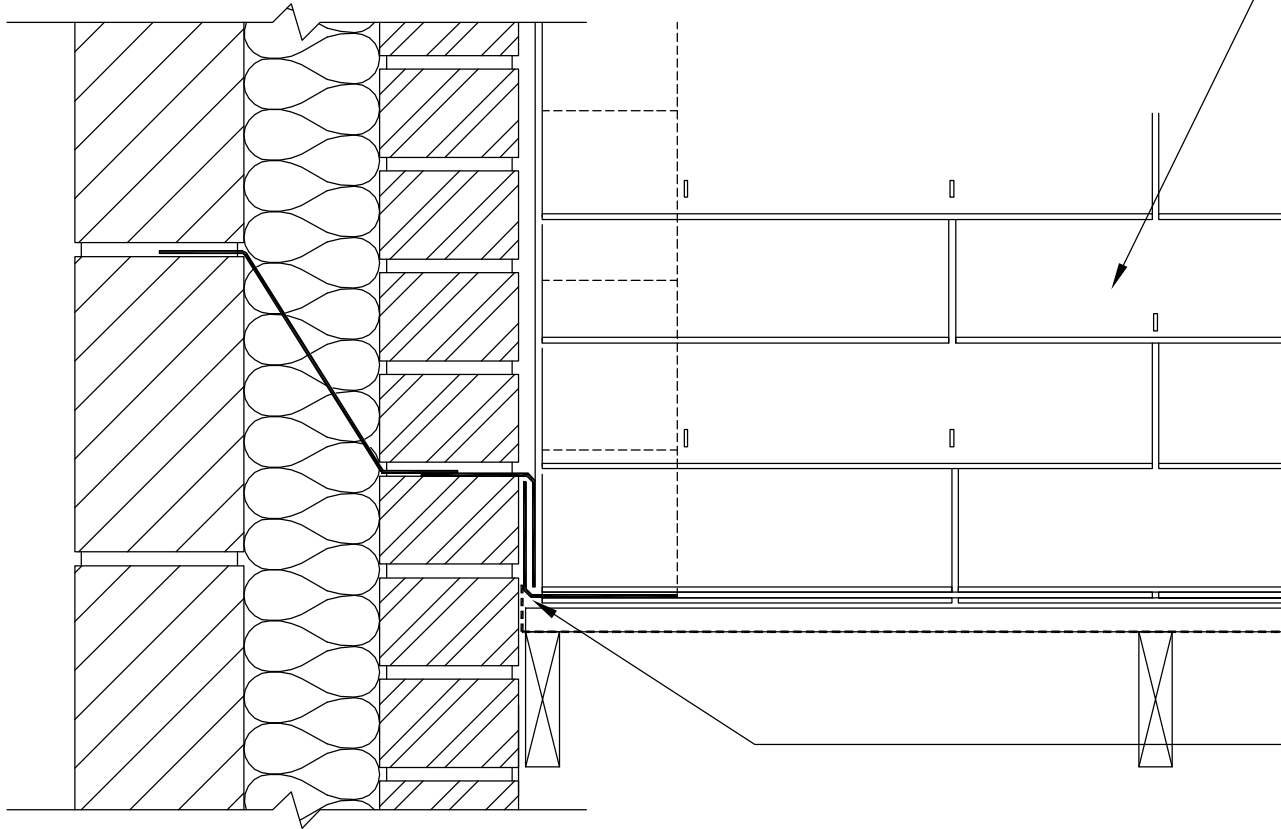

Lead soakers and cover flashing, girth, cover, upstand and lap as recommended by BS EN 12588:2006

CEMBRIT LIMITED  
SLATE TO SIDE ABUTMENT TYPICAL DETAIL  
600x300 JUTLAND (FIBRE CEMENT) SLATE  
DRG No. 200 H61/105 and 660