


Water resistant Permo® frame

Treated timber battens gauged to suit tile size

Clay or concrete plain tiles

Note:
Klober recommend that 19mm deep counter
battens are used on sites that are severely
exposed

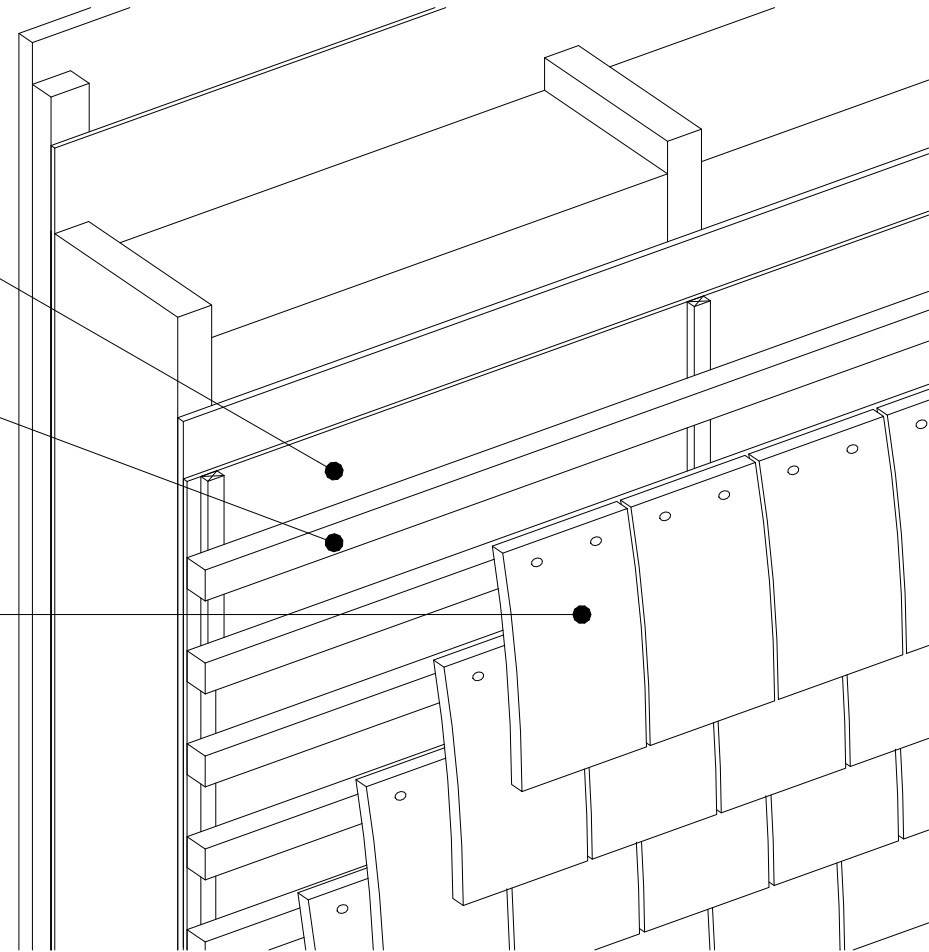

KLOBER
TYPICAL TIMBER FRAME WITH TILE CLADDING OPTION
DRG No. KL007