

ACOUSTIC PERFORMANCE

IMPACT L_nTW = 53dB AIRBORNE D_nTW = 58dB AIRBORNE D_nTW + Ctr dB = 55dB

RESULTS BASED ON HUSH PLY 32 BEING LAID OVER A FLOOR STRUCTURE WITH A SUITABLE CEILING TREATMENT AND ALL FLANKING PATHS REMOVED.

PRODUCT DATA

CAN BE LAID OVER CONCRETE, EXISTING TIMBER FLOORS OR DIRECTLY OVER JOISTS UP TO 450mm CENTRES *

COMPRISES OF 22mm EBP TONGUED AND GROOVED PLYWOOD WITH 10mm HUSHFELT™ RESILIENT LAYER.

OVERALL BOARD DIMENSIONS 2400 x 600 x 32mm.

OVERALL NOMINAL THICKNESS 32mm.

FFL OVER FLOOR STRUCTURE 30mm.

FFL OVER TIMBER JOISTS *38 - 40mm (USED IN CONJUNCTION WITH HUSH-10 JOIST STRIPS).

FEATURES

STRONG, DURABLE AND WATERPROOF.

IDEAL FOR FLOORING FINISHES THAT REQUIRE SCREW FIXINGS.
(PLEASE SPEAK TO HUSH TECHNICAL TEAM FOR ADVICE ON SCREW FIXING FLOOR FINISHES TO HUSH FLOORING PRODUCTS).

SUITABLE FOR NEW BUILD, CHANGE OF USE AND REFURBISHMENT PROJECTS.


CAN BE TILED OVER IF USED WITH PERMALAYER AND A FLEXIBLE ADHESIVE.

CAN BE USED AS PART OF A CODE FOR SUSTAINABLE HOMES COMPLIANT DEVELOPMENT.

BUILDING REGULATIONS PART E (ENGLAND & WALES), SECTION 5 (SCOTLAND) AND PART G (NORTHERN IRELAND).

ROBUST DETAILS FFT5 COMPLIANT FOR FLOOR STRUCTURES EFC-1, EFC-2 AND EFS-1.

EASY TO INSTALL.

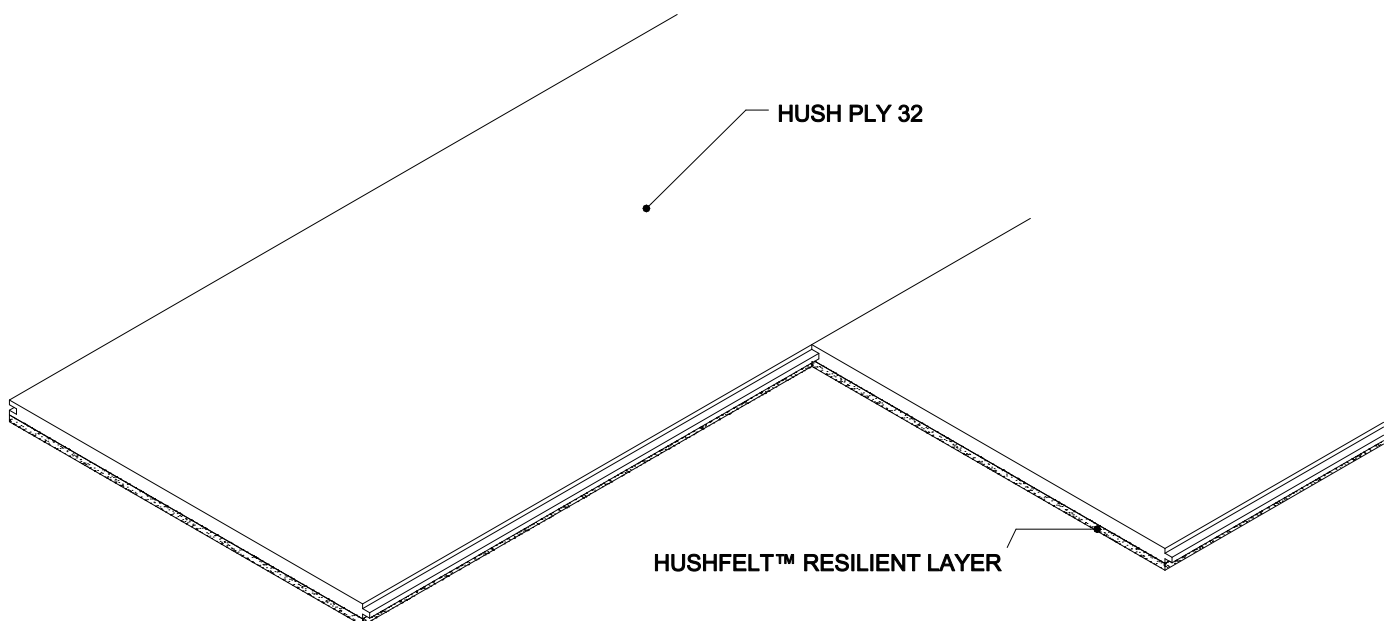

HUSH (UK) LTD
HUSH PLY 32