

PRODUCT SPECIFICATIONS

PRODUCT SIZE: AVAILABLE AS SHEET: 1000mm WIDE x SELECTED LENGTH (WIDTH TOLERANCE $\pm 1\%$)
OR TILE: 50cm x 50cm

COMPOSITION: CONSTRUCTED FROM POLYESTER FIBRES THERMALLY BONDED IN A NON-WOVEN MATRIX
AND LAMINATED TO A HIGH DENSITY NON-WOVEN POLYESTER BACKING.

FABRIC TEXTURE: FINE VELOUR

BACKING MATERIAL: 100% POLYESTER

MANUFACTURED THICKNESS: 9-10mm (BESPOKE THICKNESSES AVAILABLE ON REQUEST).

PRODUCT WEIGHT: TYPICALLY 1600gsm

ACOUSTIC PERFORMANCE: BS-EN-ISO354 SOUND ABSORPTION CLASS 'E' NOISE REDUCTION COEFFICIENT
OF 0.25

INDUSTRY SUITABILITY

THIS PRODUCT MEETS THE BRITISH STANDARDS SPECIFICATIONS FOR THE USE DESCRIBED. BS476 PART7
(CLASS IV).


CLASSROOM WALLS, HALLWAYS, CORRIDORS, LECTURE THEATRES, LIBRARIES, STAFF ROOMS, COMPUTER
ROOMS, MUSIC ROOMS, STUDIOS, CINEMA'S, PRISONS, POLICE INTERVIEW ROOMS, SCHOOL / NURSERY,
TELEPHONE CALL CENTRES.

PERFORMANCE / DURABILITY

LIGHT REFLECTANCE VALUE. (BS8493:2008). LIGHT REFLECTANCE VALUES FOR ALL PRODUCTS AND COLOURS
ARE AVAILABLE FROM OUR SALES OFFICE STAFF.

INSTALLATION

THE HUSH ACOUSTIC WALL COVERING IS EASILY INSTALLED FROM ROLL MATERIAL OR OUR 500 x 500mm TILE.
IF IN ROLL FORMAT THE PRODUCT IS INSTALLED LENGTHWAYS DOWN THE CHOSEN SECTOR WITH EACH PANEL
BUTT JOINING CLOSELY TO ITS NEIGHBOUR. THE REQUIRED FITTINGS i.e. EDGING STRIPS, JOINERS, INTERNAL
AND EXTERNAL FINISHES ARE EASILY SOURCED.

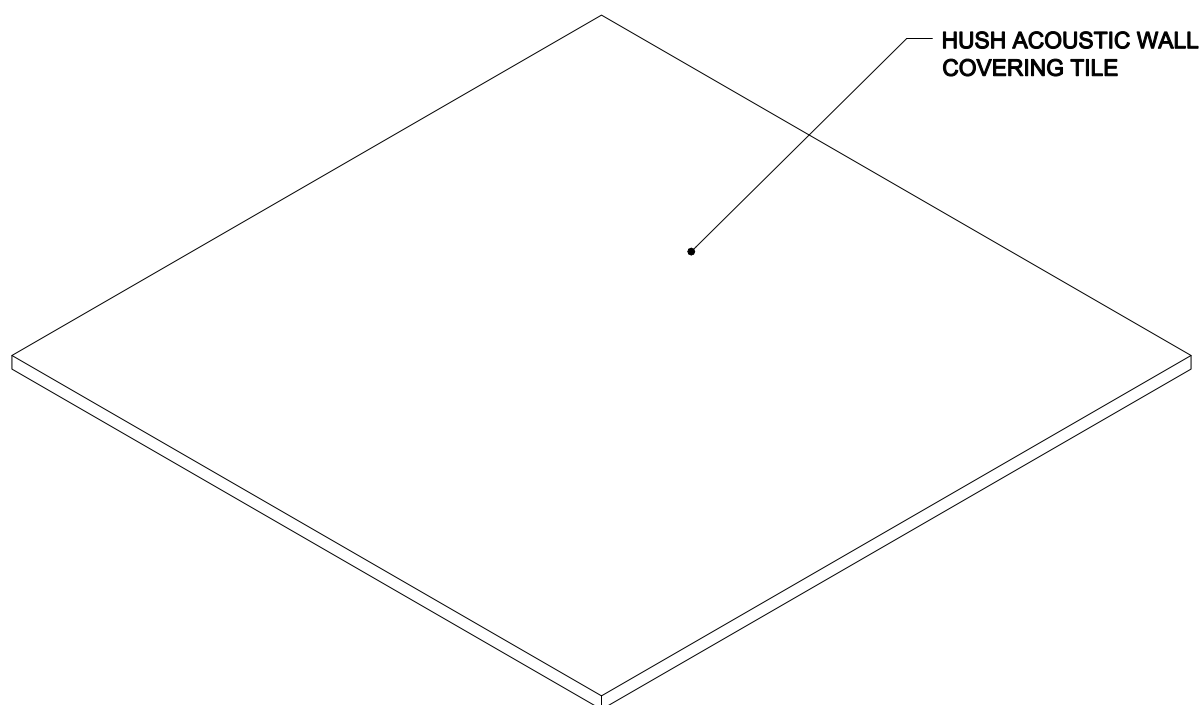

HUSH (UK) LTD
HUSH ACOUSTIC WALL COVERING