

ACOUSTIC PERFORMANCE

IMPACT L_nTW = 56dB AIRBORNE D_nTW = 55dB AIRBORNE D_nTW + C_{tr} dB = 48dB

BASED ON RECOMMENDED SYSTEM INCORPORATING HUSH-PANEL 17 OVER NEW FLOORBOARDS.

PRODUCT DATA

CAN BE LAID OVER EXISTING OR NEW CONCRETE AND TIMBER FLOORS.

COMPRISES 9mm MOISTURE RESISTANT TONGUED AND GROOVED MDF WITH 10mm HUSHFELT™ RESILIENT LAYER.

OVERALL BOARD DIMENSIONS 1200mm x 600mm x 17mm.

OVERALL NOMINAL THICKNESS 19mm.

FFL OVER FLOOR DECK 17mm.

FEATURES

EXCELLENT ACOUSTIC PERFORMANCE.

IDEAL FOR AREAS WITH LIMITED ROOM HEIGHT.

REFURBISHMENT AND NEW BUILD.


COMPATIBLE WITH A RANGE OF HUSH-SYSTEMS.

CAN BE TILED OVER IF USED WITH PERMALAYER AND A FLEXIBLE ADHESIVE.

CAN BE USED AS PART OF A CODE FOR SUSTAINABLE HOMES COMPLIANT DEVELOPMENT.

BUILDING REGULATIONS PART E (ENGLAND AND WALES), SECTION 5 (SCOTLAND) AND PART G (NORTHERN IRELAND).

ROBUST DETAILS FFT5 COMPLIANT FOR FLOOR STRUCTURES EFC-1, EFC-2 AND EFS-1.

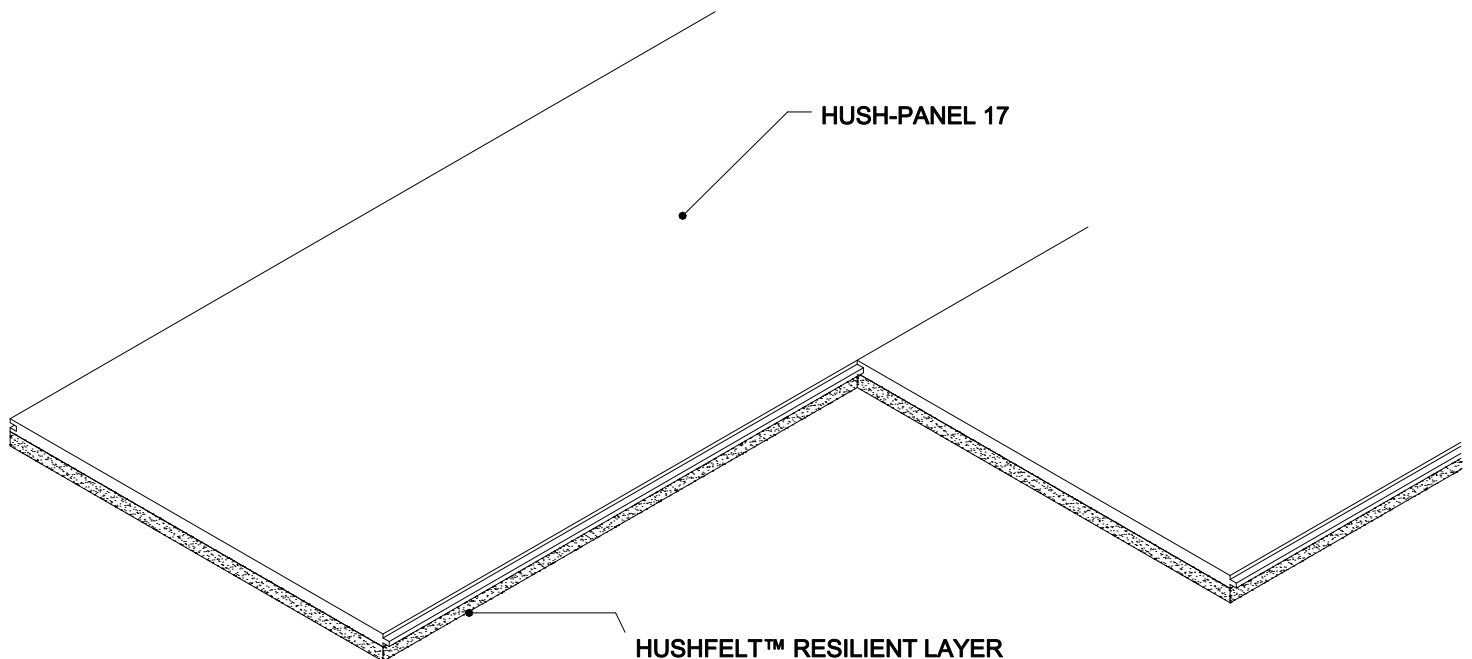

HUSH (UK) LTD
HUSH - PANEL 17