

ACOUSTIC PERFORMANCE

IMPACT L_nTW = 48dB AIRBORNE D_nTW = 58dB AIRBORNE D_nTW + C_{tr} dB = 56dB

RESULTS BASED ON HUSH-PANEL 37 BEING USED WITHIN A TIMBER FRAME APPLICATION.

PRODUCT DATA

HIGH PERFORMING ACOUSTIC FLOORING OF USE WITHIN DEVELOPMENTS WITH TIMBER STRUCTURES.

COMPRISES OF 22mm HIGH DENSITY P5 MOISTURE RESISTANT CHIPBOARD WITH 10mm HUSHFELT™ RESILIENT LAYER AND A 5mm HUSH BARRIER MAT.

OVERALL BOARD DIMENSIONS 2400 x 600 x 37mm.

OVERALL NOMINAL THICKNESS 37mm.

BOARD DENSITY 28kg PER BOARD.

MUST BE USED WITH THE HUSH RD FLANKING STRIP.

THE BOARD JOINTS TO BE BONDED WITH HUSH BOND PANEL ADHESIVE.

FEATURES

VERSATILE AND ECONOMICAL.

REFURBISHMENT AND NEW BUILD.

COMPATIBLE WITH A RANGE OF HUSH-SYSTEMS.


CAN BE USED AS PART OF A CODE FOR SUSTAINABLE HOMES COMPLIANT DEVELOPMENT.

BUILDING REGULATIONS PART E (ENGLAND & WALES), SECTION 5 (SCOTLAND) AND PART G (NORTHERN IRELAND).

CAN ACHIEVE ROBUST DETAILS PERFORMANCE LEVELS ON TIMBER FRAME DEVELOPMENT.

EASY TO INSTALL IN A SINGLE TIME SAVING OPERATION.

A PEEL CLEAN VERSION IS NOW AVAILABLE TO ALLOW FOR SPOTLESS HANDOVERS.

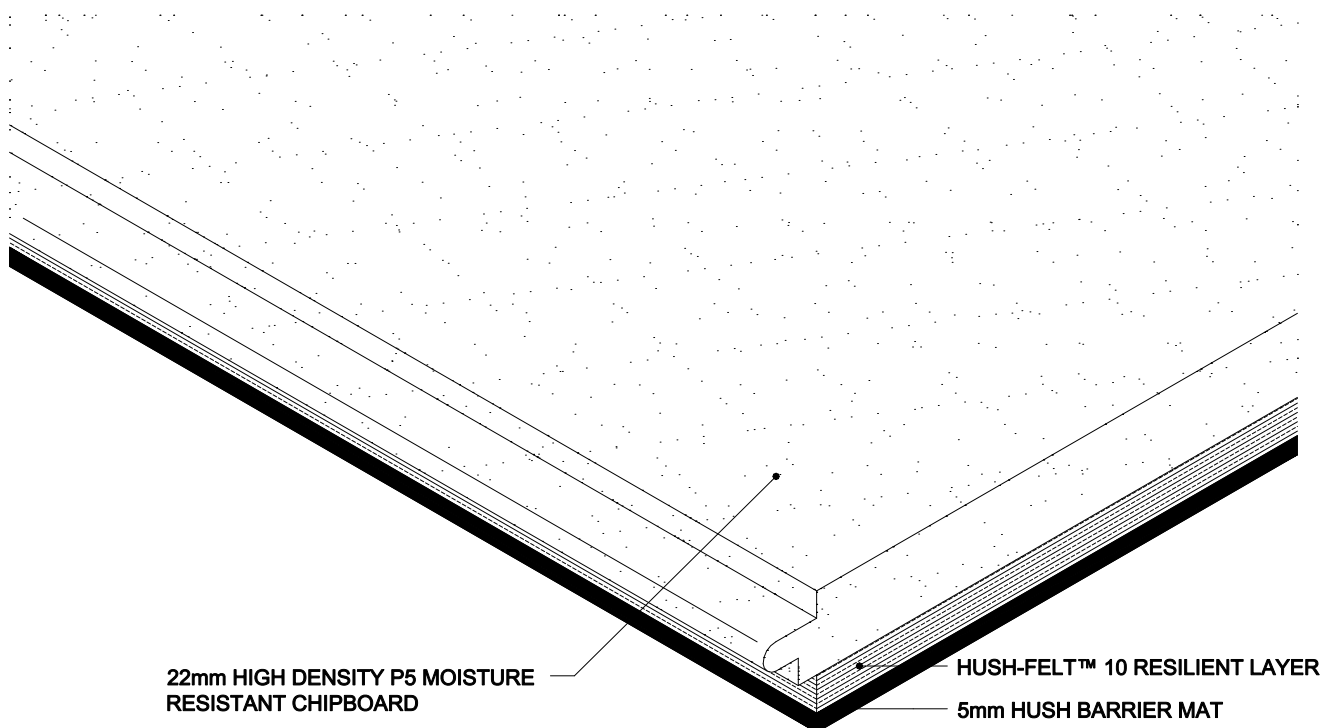

HUSH (UK) LTD
HUSH PANEL 37