

ACOUSTIC PERFORMANCE

CAN BE USED AS PART OF A SYSTEM TO ACHIEVE THE INTERNAL FLOOR REGULATIONS SET OUT IN THE BUILDING REGULATIONS. THESE ARE 40dB (RW) IN DOCUMENT E (ENGLAND & WALES), PART G (NORTHERN IRELAND) AND 43dB (RW) STATED IN SECTION 5 (SCOTLAND).

PRODUCT DATA

STAPLED DIRECTLY ON TO TIMBER JOISTS OR GLUED ON TO METAL JOISTS AS PART OF A HUSH INTERNAL FLOOR CONSTRUCTION TO MEET THE INTERNAL FLOOR REGULATIONS SET OUT IN DOCUMENT E (ENGLAND & WALES), PART G (NORTHERN IRELAND) AND SECTION 5 (SCOTLAND).

10mm THICKNESS x 50mm WIDE x 1.37m LONG.

NOMINAL THICKNESS OF 10mm. WILL COMPRESS TO 8mm IN USE.

FEATURES


THIN SOLUTION FOR ISOLATING TIMBER FLOORS FROM JOISTS.

EXCELLENT IMPACT REDUCTION.

EASY TO INSTALL.

IMPROVES ACOUSTIC PERFORMANCE IN DOMESTIC DWELLINGS.

TO BE USED WITH THE HUSH SLAB 100 AND SUITABLE CEILING LINING TO ACHIEVE THE INTERNAL FLOOR REGULATIONS OF DOCUMENT E (ENGLAND & WALES) AND SECTION 5 (SCOTLAND).

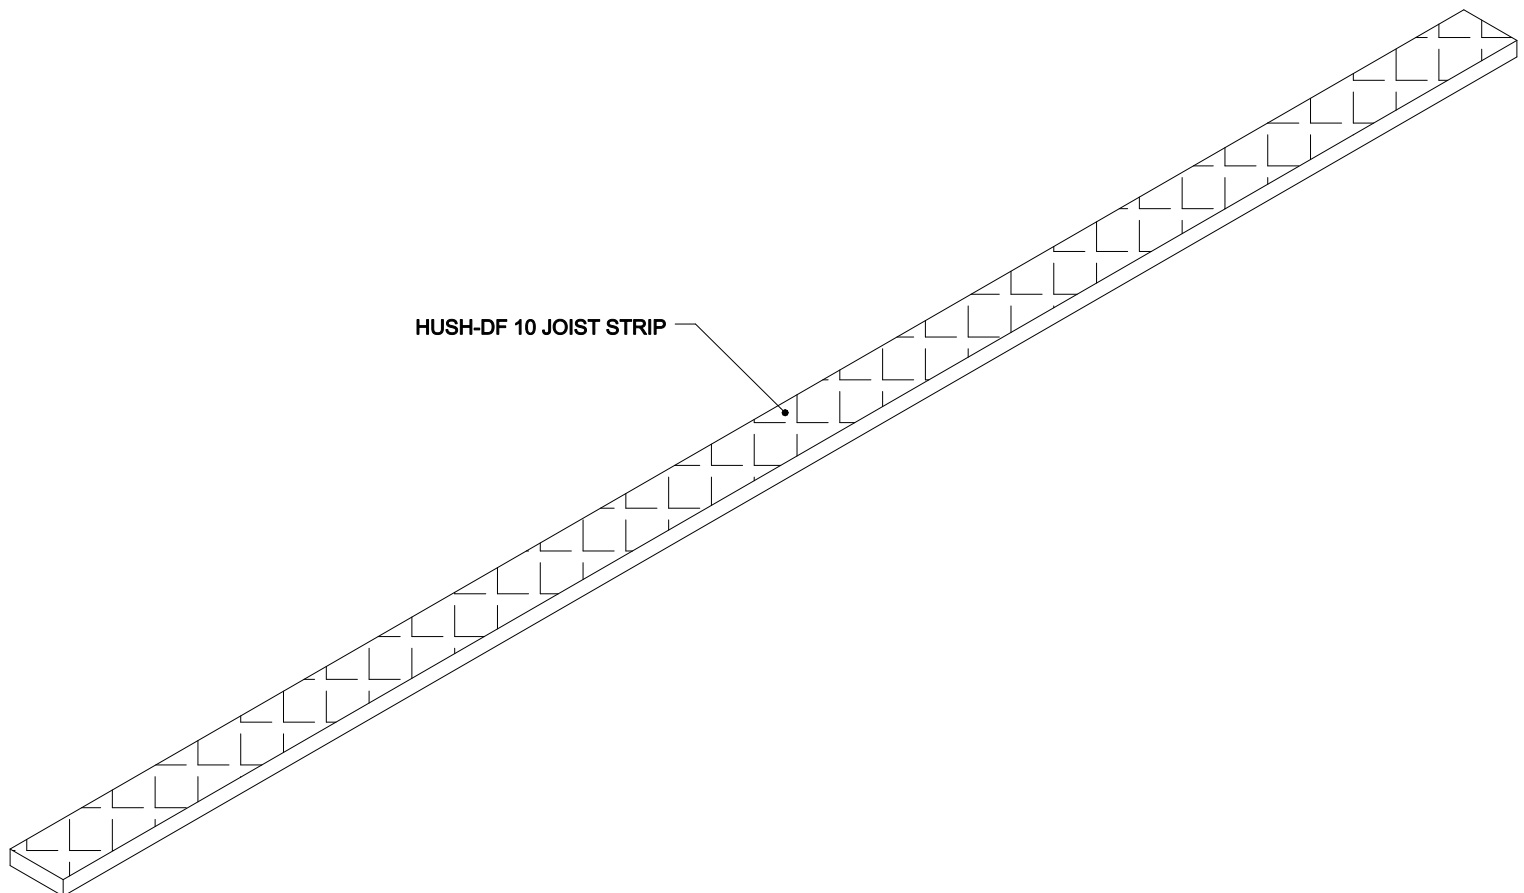

HUSH (UK) LTD
HUSH-DF 10 JOIST STRIP