


Ridge fixing in accordance with manufacturers printed instructions using 2 No. Sela fasteners per ridge tile. Felt cut back at vent location

Copper Disc Rivets & Nails to BS 5534 part 1 2003

Fixing in accordance with the manufacturers printed instructions, BS5534 part 1 2003, BS8000 part 6 1990 and H61/210 and 275

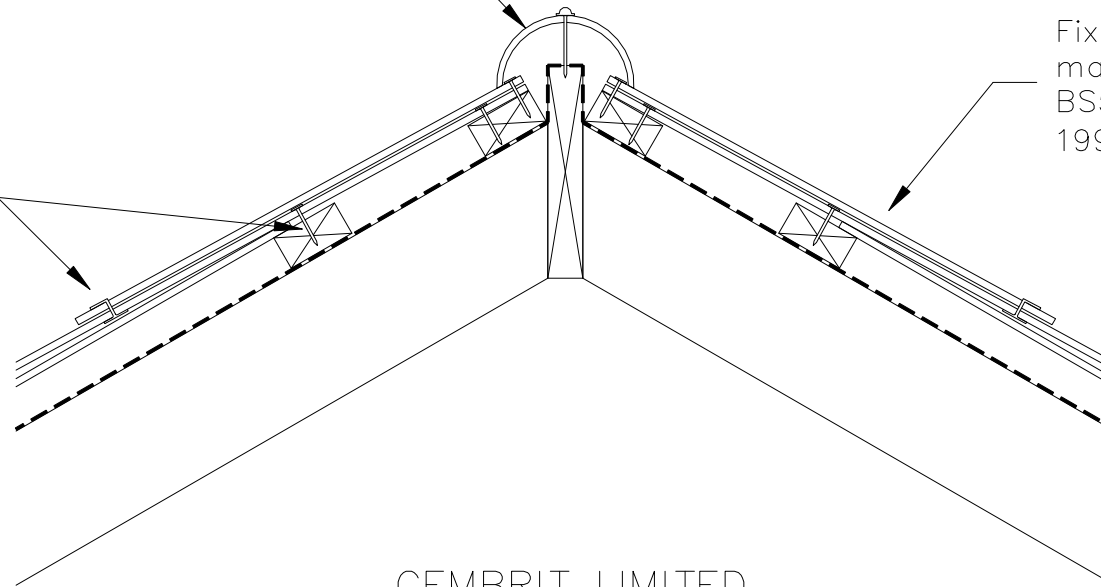

CEMBRIT LIMITED
HALF ROUND RIDGE TYPICAL DETAIL
600x300 JUTLAND (FIBRE CEMENT) SLATE
DRG No. 250 H61/105 and 710