


Fixing in accordance with the manufacturers printed instructions, BS5534:2014 + A2:2018, BS8000 part 6 2013 and H62/210 and 275

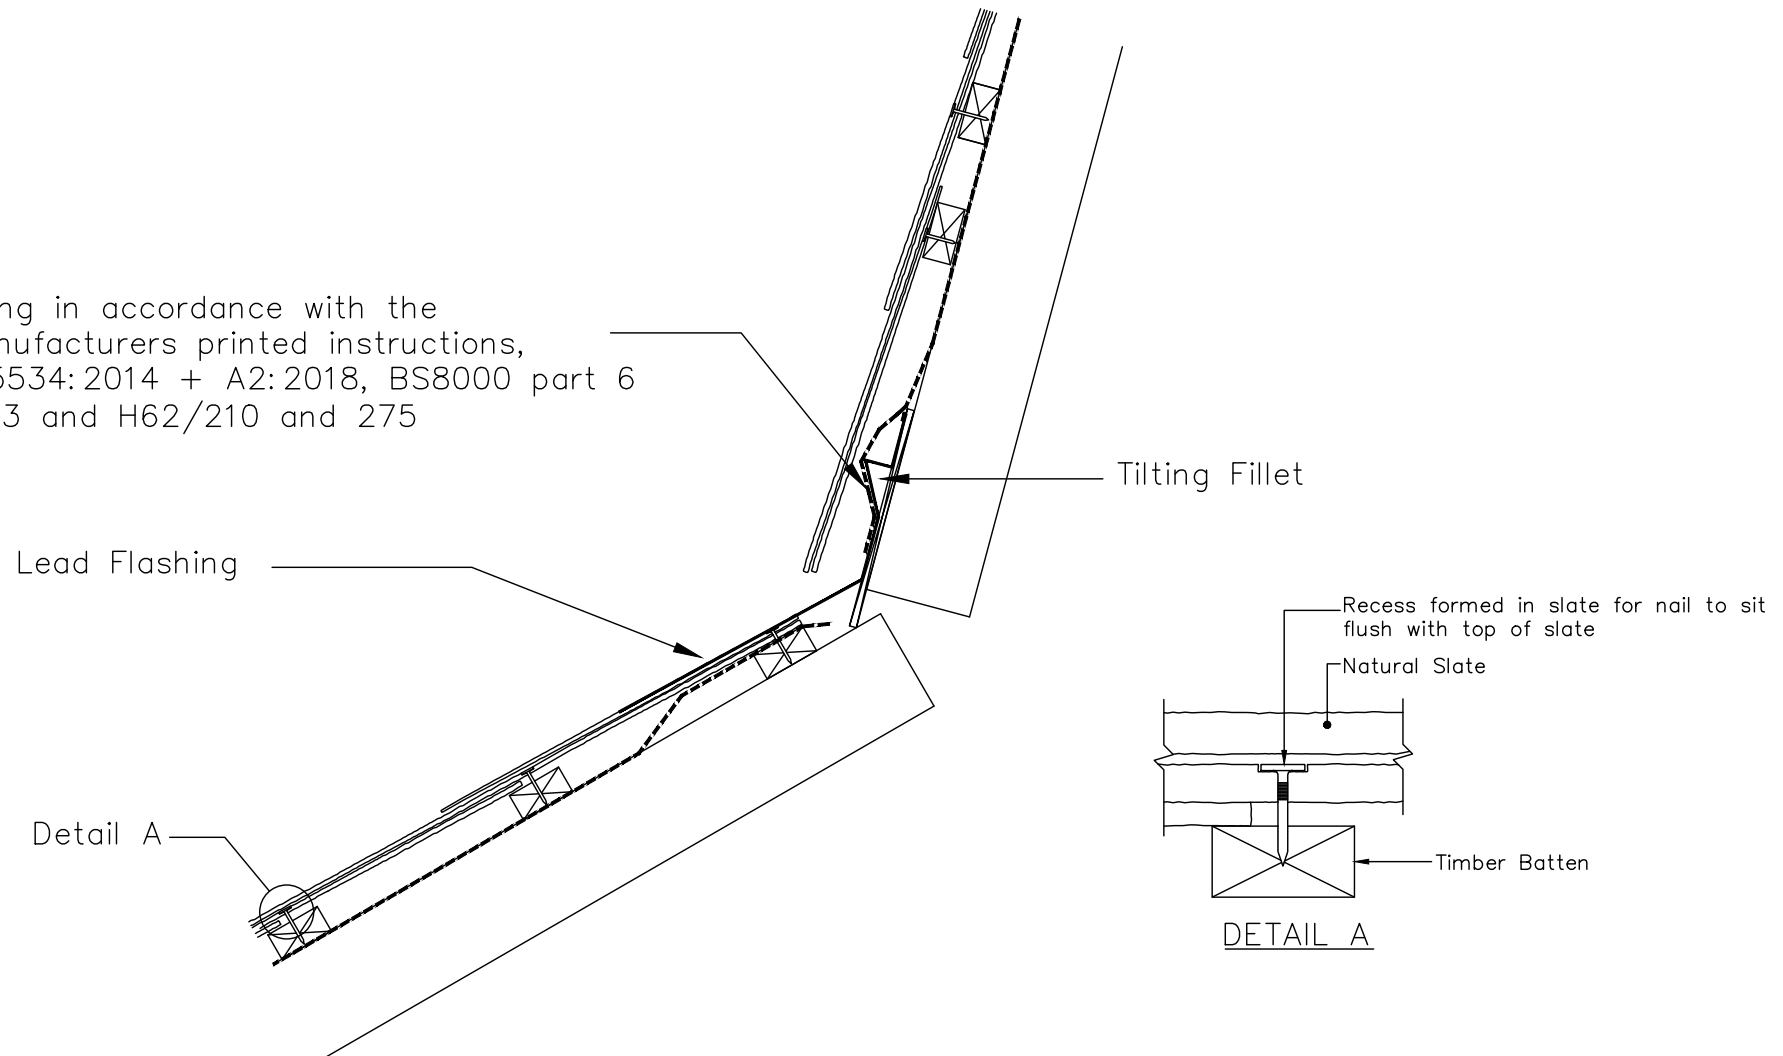

Grade slates into 3 or 4 groups of equal thickness.
 Sort slates in each group so that thin end of slates will be towards the ridge.
 Hole slates from the rear.
 Lay slates of equal thickness in the same course.
 Lay thicker slates at eaves, thinner towards the ridge.

CEMBRIT LIMITED
 CHANGE IN PITCH TYPICAL DETAIL
 508x254 GLENDYNE (NATURAL SLATE)
 DRG No. 630 H62/105, 280 and 800