

## ACOUSTIC PERFORMANCE

ABSORBER THICKNESS	SOUND ABSORPTION COEFFICIENT							ABSORBER CLASS
	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	$\alpha_w$	
50mm	0.30	0.65	1	1	0.9	0.8	0.9	A

PLEASE NOTE: AS THE HUSH ABSORBING DESK DIVIDER COMPRISES TWO HUSH-ABSORBER 50 PANELS, THE ABOVE ABSORPTION DATA APPLIES TO ONE SIDE ONLY - THE OVERALL PERFORMANCE OF THE HUSH ABSORBING DESK DIVIDER IS EFFECTIVELY DOUBLE.

### HUSH ABSORBING DESK DIVIDER STANDARD SIZES (ALL 100mm OVERALL THICK)

AVAILABLE STOCK IN SIZES (SUITING STANDARD DESK LENGTHS AND WIDTHS)

1800mm	1600mm	1400mm	1200mm
1000mm	800mm	600mm	

OTHER SIZES AVAILABLE ON REQUEST.

AVAILABLE SIZES WHERE ABUTTING OTHER HUSH ABSORBERS:

700mm	1000mm	950mm	900mm
750mm	700mm		

OTHER SIZES AVAILABLE ON REQUEST.

## FEATURES


CLASS A TESTED AND CERTIFIED SOUND ABSORPTION PERFORMANCE.

EASY INSTALLATION - SIMPLY STANDS BETWEEN DESKS OR CLAMPS TO THE DESK USING THE HUSH-CLAMP ACCESSORIES.

TOUGH, ROBUST AND AN EASILY MAINTAINED FINISH.

NO PARTICLE SHED (ASSOCIATED WITH GLASS / MINERAL FIBRE ABSORBER CORES).

AN ACOUSTIC FOAM CORE.

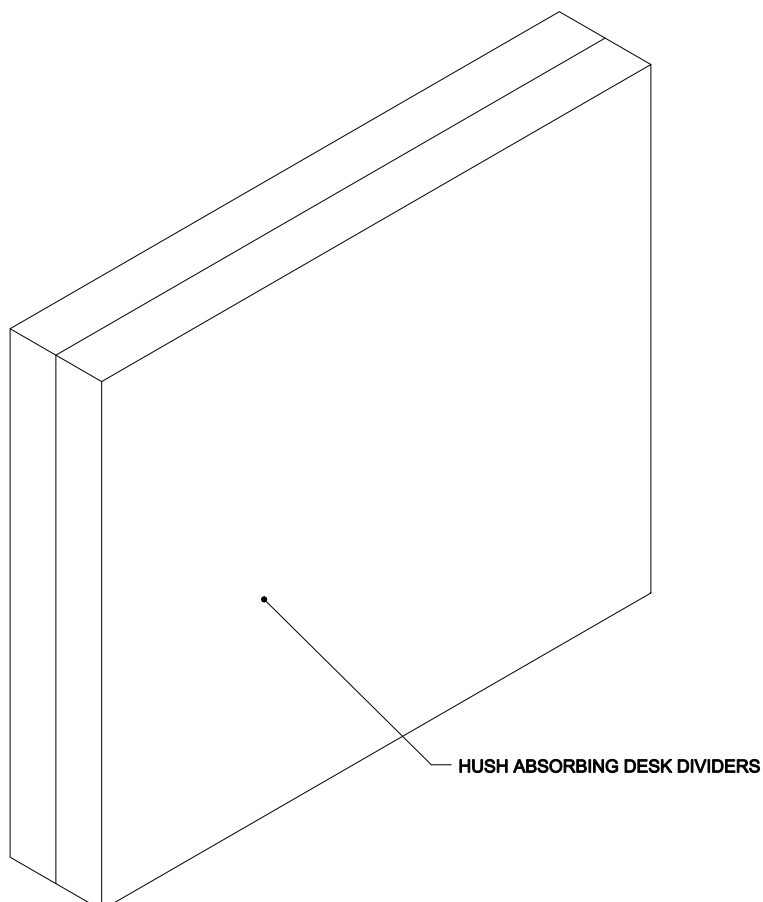

**HUSH (UK) LTD**  
**HUSH ABSORBING DESK DIVIDERS**